

WAAS CH 72827 W09A	APP CRS 088°	Rwy Ldg 4218 TDZE 1021 Apt Elev 1021
--	------------------------	---

RNAV (GPS) RWY 9
UNION COUNTY (MRT)

RNP APCH - GPS.




When Circling to Rwy 27 at night, operational VGSI required, remain on or above VGSI glidepath until threshold. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. Circling NA to Rwy 8 and 26.

MISSED APPROACH: Climb to 3000 direct NESWU and hold.



AWOS-3
119.275

COLUMBUS APP CON
125.95 317.775

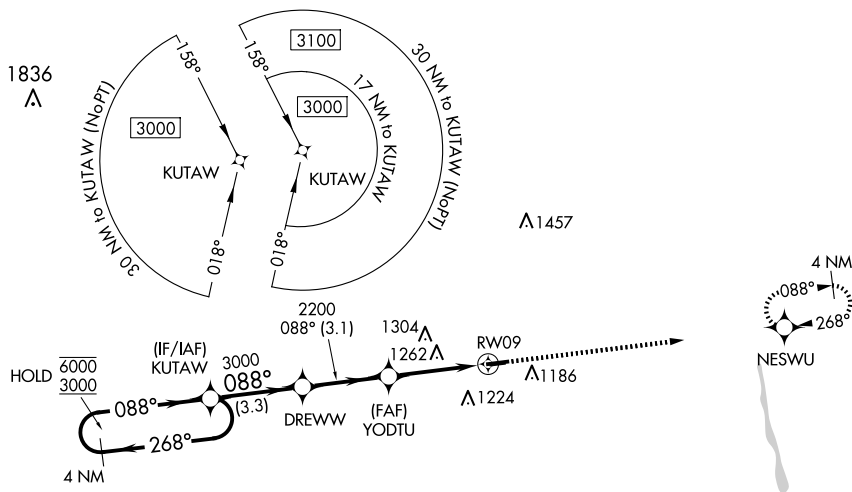UNICOM
122.8 (CTAF) **L**4 NM
Holding Pattern

VGSI and RNAV glidepath not coincident
(VGSI Angle 3.00/TCH 25).

3000	NESWU
------	-------

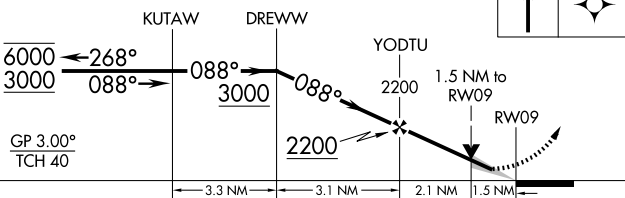

CATEGORY	A	B	C	D
LPV DA	1285-7/8 264 (300-7/8)			
LNAV/ VNAV	1432-1 1/8 411 (500-1 1/8)			
LNAV MDA	1520-1	499 (500-1)	1520-1 3/8	499 (500-1 3/8)
CIRCLING	1520-1 499 (500-1)	1540-1 519 (600-1)	1620-1 1/2 599 (600-1 1/2)	1620-2 599 (600-2)

MIRL Rwy 9-27 **L**
REIL Rwys 9 and 27 **L**