

WAAS CH 99334 W04A	APP CRS 038°	Rwy Idg TDZE 1376 Apt Elev 1379
--	------------------------	---

RNAV (GPS) RWY 4

EL DORADO/CAPT JACK THOMAS MEML (EQA)


⚠

NA


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Colonel James Jabara altimeter setting and increase all DA 51 feet and all MDA 60 feet. Baro-VNAV NA when using Colonel James Jabara altimeter setting.

MISSED APPROACH: Climb to 3100 direct SMALE and hold.

AWOS-3P 120.875	WICHITA APP CON 134.8 269.1	UNICOM 122.8 (CTAF) 0
---------------------------	---------------------------------------	---------------------------------

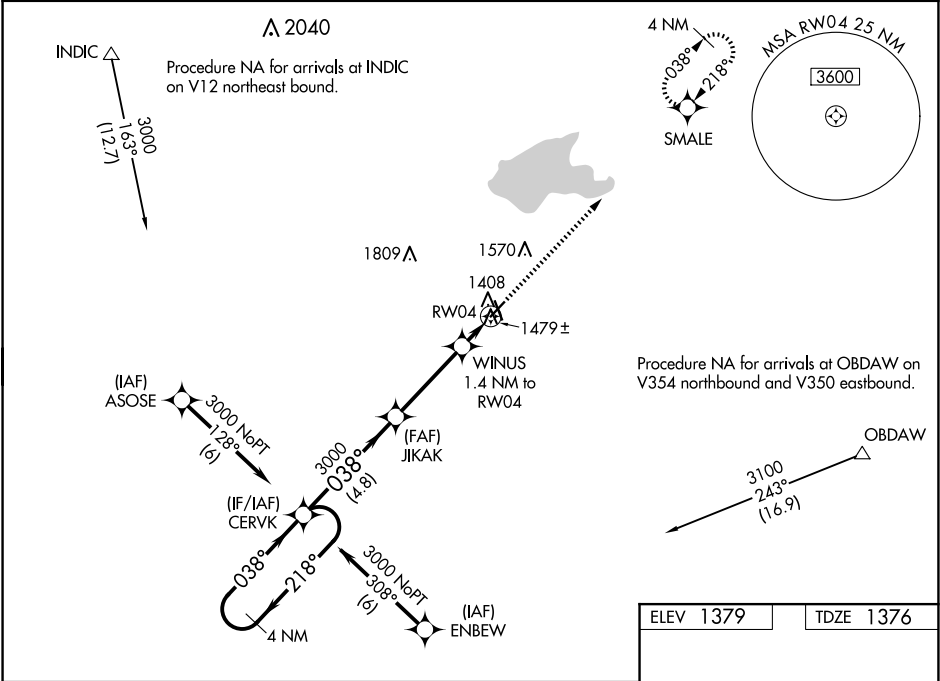

4 NM Holding Pattern		CERVK	JIKAK	3100 SMALE
3000 ← 218°		3000 → 038°	3000	↑
GP 3.00° TCH 40		038°	3000	✱
		4.8 NM	3.6 NM	1.4 NM
		*1860		
		WINUS 1.4 NM to RW04		
		RW04		
CATEGORY	A	B	C	D
LPV DA	1576-1	200 (200-1)	NA	
LNAV/VNAV DA	1626-1	250 (300-1)	NA	
LNAV MDA	1740-1	364 (400-1)	NA	
CIRCLING	1820-1 441 (500-1)	1960-1 581 (600-1)	NA	

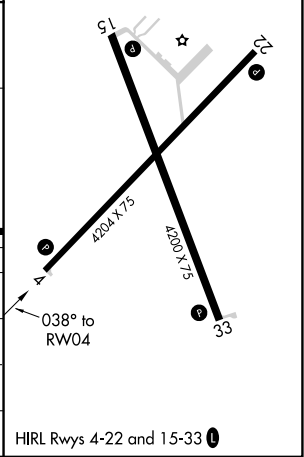

NC-2, 04 SEP 2025 to 02 OCT 2025

NC-2, 04 SEP 2025 to 02 OCT 2025