

WAAS CH 77741 W17A	APP CRS 175°	Rwy Idg 4020 TDZE 1468 Apt Elev 1468
--	------------------------	---

RNAV (GPS) RWY 17
EASTLAND MUNI (ETN)

T Helicopter visibility reduction below 1 SM NA. DME/DME RNP-0.3 NA. When local
A altimeter setting not received, use Breckenridge altimeter setting: increase all MDAs 80
feet; increase LP and LNAV visibility Cat C ¼ SM and Circling visibility Cat C ¼ SM.
Straight-in Rwy 17 NA at night. Circling Rwy 17 NA at night.


MISSED APPROACH: Climb to 3600 direct BEFKO and hold.

AWOS-3PT
118.45

FORT WORTH CENTER
127 15 314 0

UNICOM
122.8 (CTAF) **L**

Procedure NA for arrival
on MQP VORTAC
airway radials 161 CW 330.

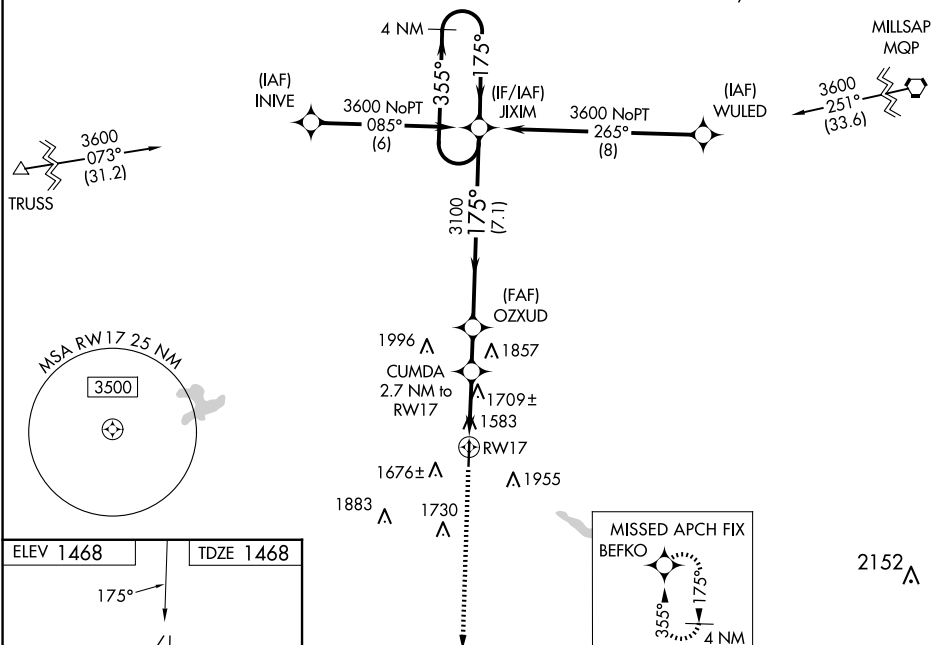

CATEGORY	A	B	C	D
LP MDA	2040-1	572 (600-1)	2040-1½ 572 (600-1½)	NA
LNAV MDA	2040-1	572 (600-1)	2040-1½ 572 (600-1½)	NA
CIRCLING	2120-1 652 (700-1)	2320-1¼ 852 (900-1¼)	2320-2½ 852 (900-2½)	NA

MIRL Rwy 17-35 **L**