

SN NDB 312	APP CRS 216°	Rwy Ldg TDZE Apt Elev	N/A N/A 270
----------------------	------------------------	-----------------------------	--

FRANCISCO MANGLONA BORJA/TINIAN INTL (TNI)(PGWT)


NDB-A

NA

Obtain local altimeter setting on CTAF; when not received, use Saipan altimeter setting and increase all MDA 40 feet, and all Cats visibility ¼ SM. Increase UYHEW fix minimums Cats C and D visibility ¼ mile. # DME from I-GSN LOC/DME.

MISSED APPROACH: Climbing right turn to 2800 direct SN NDB and hold.

GUAM CERAP 118.4 290.5	SAIPAN RADIO 123.6 (CTAF) 0
----------------------------------	---------------------------------------

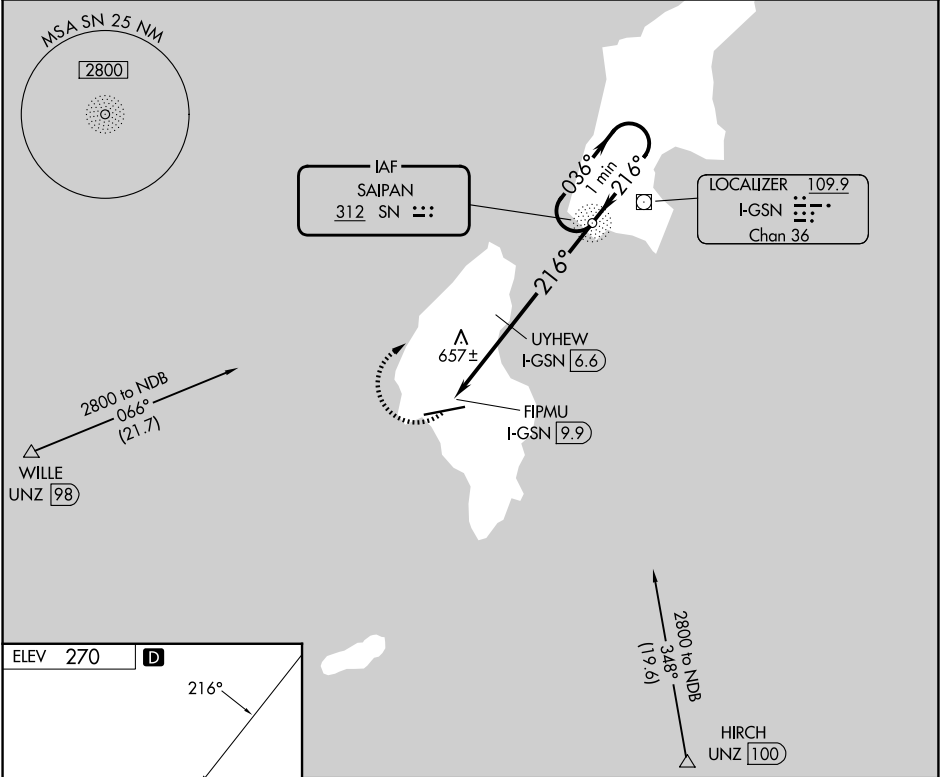

ELEV 270 **D**

MIRL Rwy 8-26 **0**
REIL Rwys 8 and 26 **0**

FAF to MAP 8 NM

Knots	60	90	120	150	180
Min:Sec	8:00	5:20	4:00	3:12	2:40

2800	SN	SN NDB	One Minute Holding Pattern	
	UYHEW I-GSN 6.6	FIPMU I-GSN 9.9	2800	
	1060*	1060-2 1/4 790 (800-2 1/4)	1060-2 1/2 790 (800-2 1/2)	
*1100 when using Saipan altimeter setting.				
# UYHEW FIX MINIMUMS				
CATEGORY	A	B	C	D
CIRCLING	1060-1	790 (800-1)	1060-2 1/4 790 (800-2 1/4)	1060-2 1/2 790 (800-2 1/2)
CIRCLING	1000-1	730 (800-1)	1000-2 730 (800-2)	1060-2 1/2 790 (800-2 1/2)