

WAAS CH 58326 W11A	APP CRS 110°	Rwy Idg TDZE Apt Elev 8900 7096 7096
--	------------------------	--

RNAV (GPS) RWY 11


RALPH WENZ FLD (PNA)

▼ Baro-VNAV NA. When local altimeter setting not received, use Big Piney altimeter setting and increase LPV DA to 7404 feet and all visibilities ¼ SM; increase LNAV/VNAV DA to 7413 feet and all visibilities ¼ SM; increase all MDA 60 feet and LNAV Cat C/D visibility ¼ SM. Circling NA south of Rwy 11/29. DME/DME RNP- 0.3 NA. VDP NA with Big Piney altimeter setting.

ODALS

MISSED APPROACH: Climb to 10000 direct FEDPA and on track 194° to SEYTO and hold.

AWOS-3 118.325	SALT LAKE CENTER 128.35 239.25	UNICOM 122.8 (CTAF) 0
--------------------------	--	---------------------------------

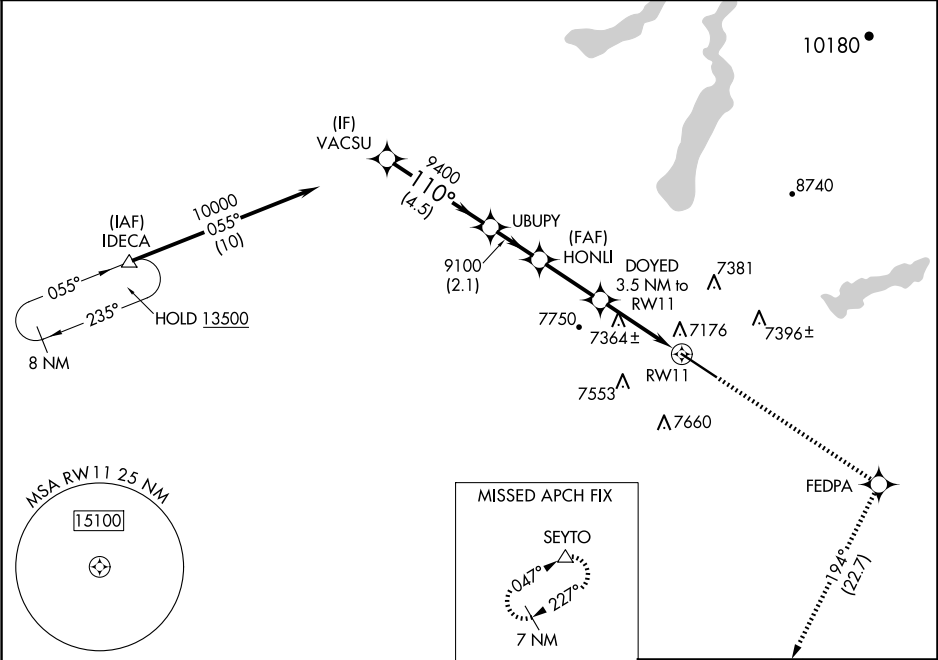

VGSI and RNAV glidepath not coincident (VGSI Angle 2.83/TCH 40).		10000		FEDPA	tr 194°	SEYTO	ELEV 7096	TDZE 7096
VACSU		UBUPY	HONLI	DOYED 3.5 NM to RW11	*LNAV only.			
10000		9400	9100	*8260	*1.5 NM to RW11	RW11		
GP 3.00° TCH 55		4.5 NM	2.1 NM	2.6 NM	2 NM	1.5 NM		
CATEGORY	A	B	C	D				
LPV DA	7346-3/4 250 (300-3/4)							
LNAV/VNAV DA	7355-3/4 259 (300-3/4)							
LNAV MDA	7620-1	524 (600-1)	7620-1 1/2	524 (600-1 1/2)				
CIRCLING	7640-1	544 (600-1)	7840-2 1/4 744 (800-2 1/4)	7980-3 884 (900-3)				

110°

9400

9100

*8260

*1.5 NM to RW11

RW11

4.5 NM

2.1 NM

2.6 NM

2 NM

1.5 NM

110°

8900 X 100

0.3° UP

MIRL Rwy 11-29 0

REIL Rwy 11 and 29 0