
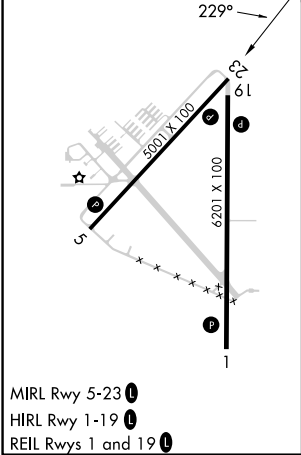


WAAS CH 45538 W23A	APP CRS 229°	Rwy Idg 5001 TDZE 88 Apt Elev 90
--	------------------------	---

RNAV (GPS) RWY 23
ZEPHYRHILLS MUNI (ZPH)

RNP APCH. Baro-VNAV and VDP NA when using Tampa Exec altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. Rwy 23 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Tampa Exec altimeter setting and increase all DA 48 feet and all MDA 60 feet. Increase LPV and LNAV/VNAV all Cats, LNAV and Circling Cat C/D visibility ¼ mile.		MISSED APPROACH: Climb to 2000 direct BRUNT and hold.
---	--	--

AWOS-3PT 118.975	TAMPA APP CON 119.9 290.3	UNICOM 123.075 (CTAF)
----------------------------	-------------------------------------	---------------------------------

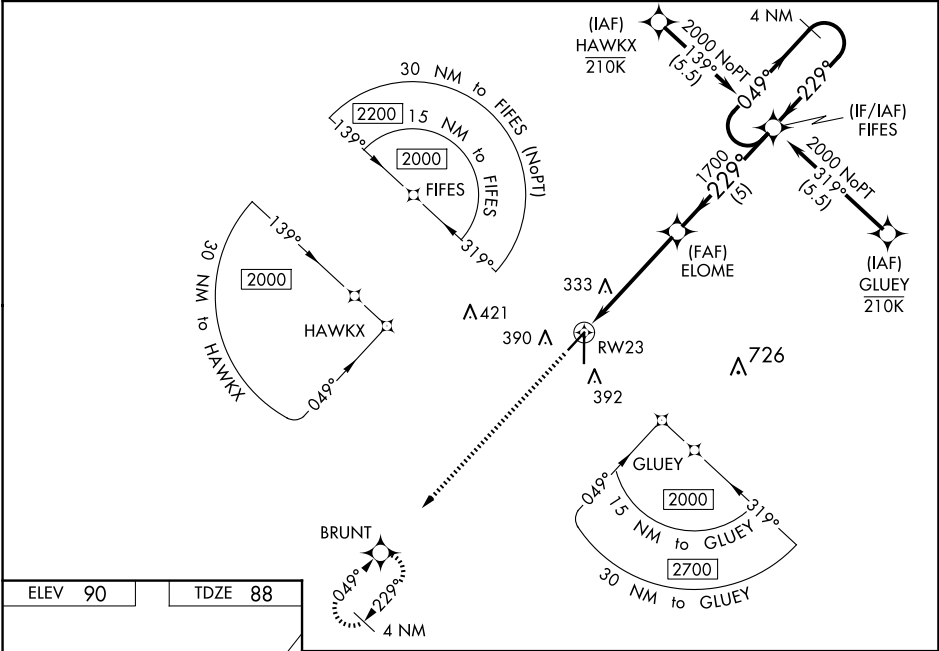

ELEV 90 TDZE 88		2000 BRUNT		VGSi and RNAV glidepath not coincident (VGSi Angle 3.61/TCH 41).		4 NM Holding Pattern	
*LNAV only		*1.5 NM to RW23		ELOME		FIFES	
1.5 NM		3.4 NM		5 NM		049° → 2000	
CATEGORY		A		B		C	
LPV DA		377-1		289 (300-1)			
LNAV/VNAV DA		409-1		321 (400-1)			
LNAV MDA		600-1		512 (600-1)		600-1 512 (600-1 512)	
CIRCLING		740-1		650 (700-1)		740-1 650 (700-1 650)	

SE-3, 04 SEP 2025 to 02 OCT 2025

SE-3, 04 SEP 2025 to 02 OCT 2025