

WAAS CH 90347 W17A	APP CRS 166°	Rwy Ldg TDZE 1309 Apt Elev 1309
--	------------------------	---

RNAV (GPS) RWY 17


REDFIELD MUNI (1D8)

RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. Baro-VNAV and VDP NA when using ABR altimeter setting. When local altimeter not received, use ABR altimeter setting and increase LPV DA to 1643 feet; increase LNAV/VNAV DA to 1738 feet and all visibilities ¼ SM. Increase all MDAs 100 feet.

MISSED APPROACH: Climb to 3400 direct LAVDE and hold.

AWOS-3P 118.525	MINNEAPOLIS CENTER 126.25 339.8	UNICOM 122.8 (CTAF) 0
---------------------------	---	---------------------------------

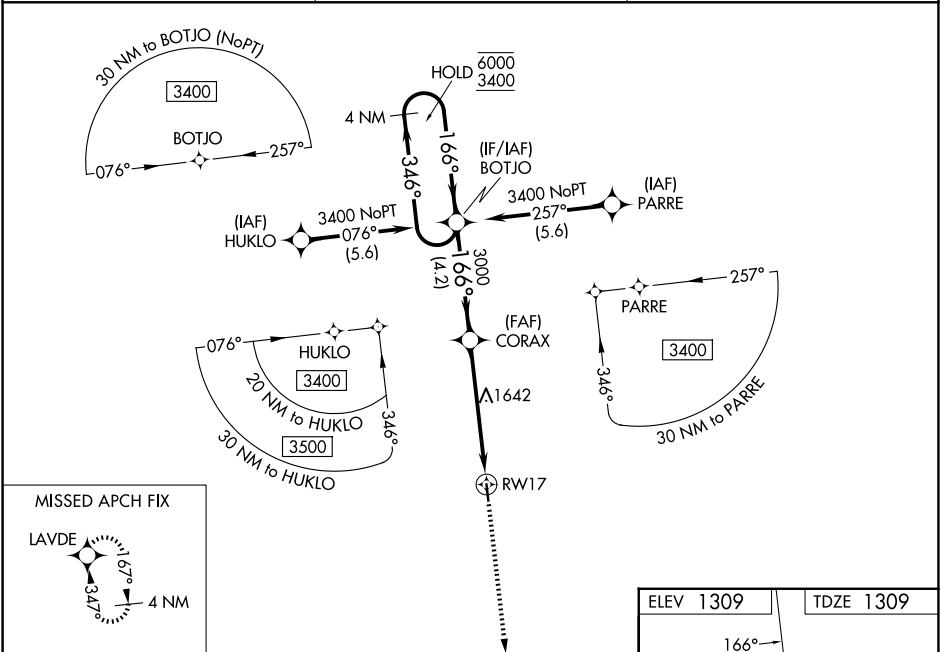

4 NM Holding Pattern		BOTJO		CORAX		RW17	
6000		346°		166°		1.7 NM to RW17	
3400		166°		3000		RW17	
GP 3.00°		TCH 40		4.2 NM		3.5 NM	
CATEGORY		A		B		C	
LPV DA		1559-1		250 (300-1)		NA	
LNAV/VNAV DA		1654-1		345 (400-1)		NA	
LNAV MDA		1900-1		591 (600-1)		NA	
CIRCLING		1900-1		591 (600-1)		NA	

