

LAS VEGAS, NEVADA

HI-TACAN RWY 3R

TACAN LSV Chan 12	APCH CRS 029°	Rwy ldg TDZE Arpt Elev	10,051 1833 1869
----------------------	------------------	------------------------------	------------------------

AL-227 (USAF)

NELLIS AFB (KLSV)

RADAR required.


⚠ * When ALS inop, increase vis to 1 3/8 miles.
** Circling NA SE of Rwy 3R-21L.

ALSF-1



MISSED APPROACH: Climb to 9000 on LSV TACAN R-031 to VETT and hold.

ATIS 270.1	APP CON 124.95 273.55	TOWER 132.55 327.0	GND CON 121.8 275.8	CLNC DEL 120.9 289.4
---------------	--------------------------	-----------------------	------------------------	-------------------------




† CAUTION: Missed Approach
Minimum Climb Rate to 4500

Knots	60	120	180	240	300	360
V/V(fpm)	283	566	849	1132	1415	1698

Controlling Obstacle 4209'

MISSED APPROACH
requires use of RNAV or
ATC RADAR monitoring.

CAUTION: Large tower
(1193 ft) left of course at
8.6 DME. Numerous buildings
with high intensity lighting.

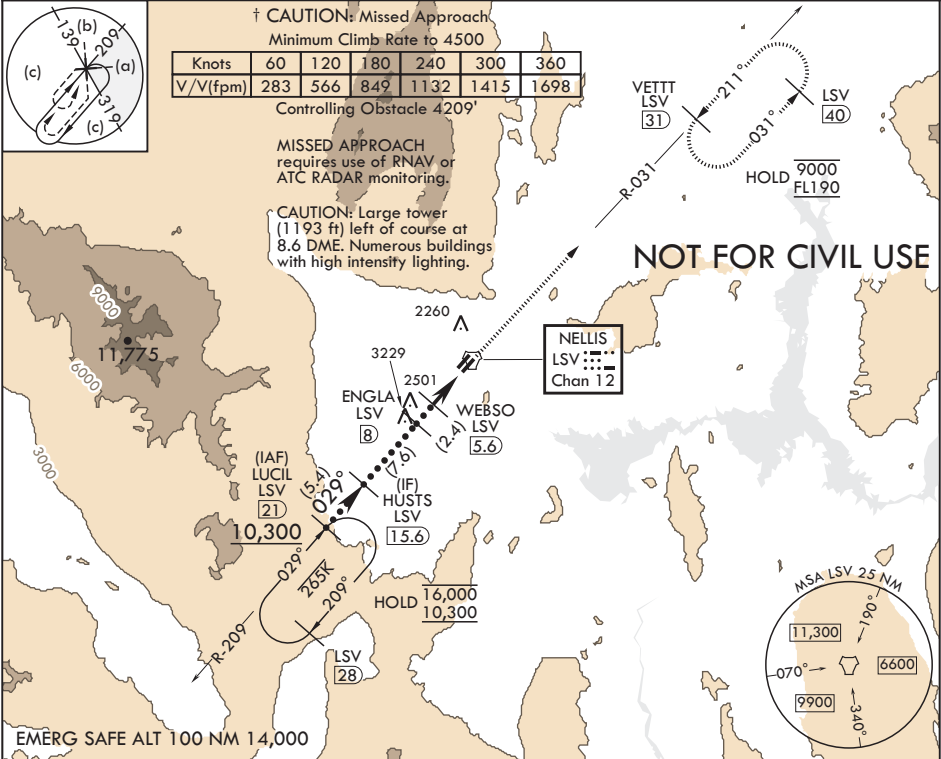

HUSTS 15.6	ENGLA 8	WEBSO 5.6	TACAN	9000 LSV R-031	VETT LSV 31	ELEV 1869	TDZE 1833
6300	3900	3220	3220	3.08° TCH 53	3.6 NM	.5	
CATEGORY	C	D	E				
S-3R	2940-3	1107	(1100-3)				
Ⓢ CIRCLING**	2940-3	1071	(1100-3)	3220-3 1351 (1400-3)			
† BELOW MINIMA REQUIRES MISSED APPROACH CLIMB GRADIENT							
S-3R*	2300/50	467	(500-1)				

LAS VEGAS, NEVADA

36°14'N - 115°02'W

NELLIS AFB (KLSV)

Amdt 10 10AUG23

HI-TACAN RWY 3R