


WAAS CH 70611 W04B	APP CRS 046°	Rwy Ldg 7200 TDZE 260 Apt Elev 266
--	------------------------	---

RNAV (GPS) RWY 4R

BILL AND HILLARY CLINTON NTL/ADAMS FLD (LIT)

RNP APCH-GPS.	MALSR 	MISSED APPROACH: Climb to 2900 direct RIRIW and on track 047° to BRAUM and hold.
▼ Rwy 4R helicopter visibility reduction below RVR 4000 NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP required during simultaneous operations. For inop ALS, increase LPV all Cts visibility to RVR 4500, LNAV/VNAV all Cts visibility to 1½ SM and LNAV Cat A/B visibility to RVR 5500 and Cat C/D to 1½ SM.		

D-ATIS 125.65	LITTLE ROCK APP CON 135.4 353.6	ADAMS TOWER 118.7 257.8	GND CON 121.9 339.8	CLNC DEL 118.95
-------------------------	---	-----------------------------------	-------------------------------	---------------------------

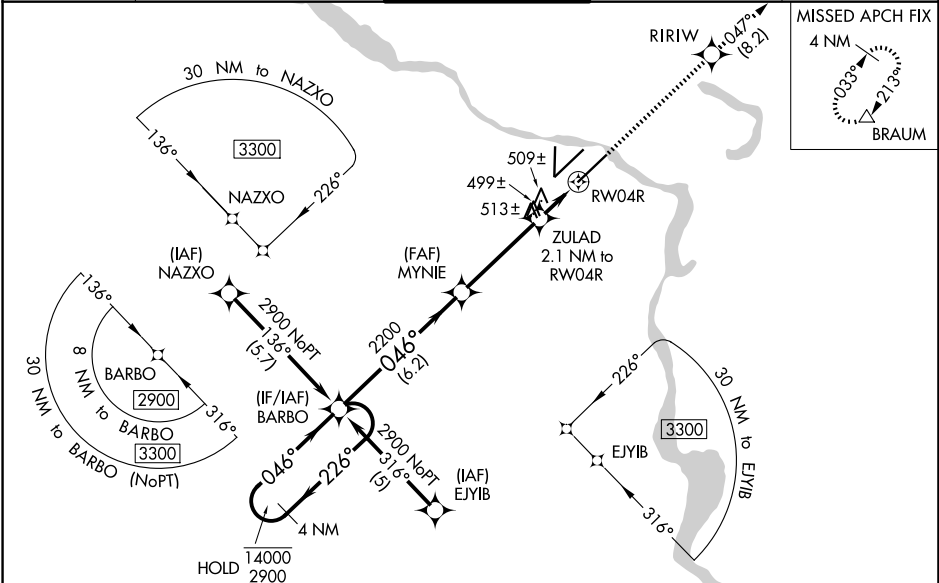

ELEV 266		D		TDZE 260	
4 NM Holding Pattern BARBO		2900 RIRIW		tr 047° BRAUM	
14000 ← 226°		2900 → 046°		046°	
GP 3.00° TCH 49		2200		960	
6.2 NM		3.7 NM		0.7 NM	
1.4 NM		0.7 NM		1.4 NM	
CATEGORY	A	B	C	D	
LPV DA	574/40		314 (400-¾)		
LNAV/VNAV DA	756/50		496 (500-1)		
LNAV MDA	760/40 500 (500-¾)		760/50 500 (500-1)		
CIRCLING	820-1 554 (600-1)	1000-1 734 (800-1)	1180-2¾ 914 (1000-2¾)	1180-3 914 (1000-3)	
MIRL Rwy 18-36		HIRL Rwy 4R-22L and 4L-22R		TDZ/CL Rwy 22R	

SC-1, 02 OCT 2025 to 30 OCT 2025

SC-1, 02 OCT 2025 to 30 OCT 2025