
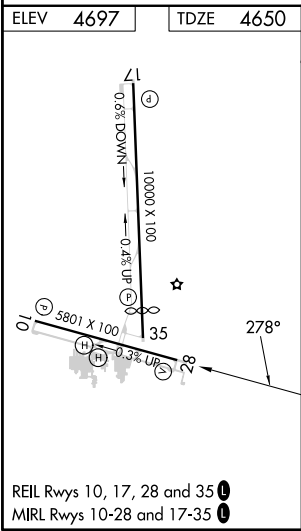


WAAS CH 86808 W28A	APP CRS 278°	Rwy Idg TDZE Apt Elev	5801 4650 4697
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 28
GREELEY-WELD COUNTY (GXY)

RNP APCH.		MISSED APPROACH: Climb to 6300 then climbing left turn to 7000 direct CEDUK and hold.	
Baro-VNAV NA when using Fort Collins/Loveland altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -24°C or above 54°C. When local altimeter setting not received, use Fort Collins/Loveland altimeter setting: increase LPV DA to 4935 feet and visibility ½ SM, LNAV/VNAV DA to 5061 feet and visibility ½ SM; increase all MDAs 100 feet and visibility Cats C and D ¼ SM.			
AWOS-3PT 135.175	DENVER APP CON 134.85 251.125	CLNC DEL 126.65	UNICOM 122.7 (CTAF) 0

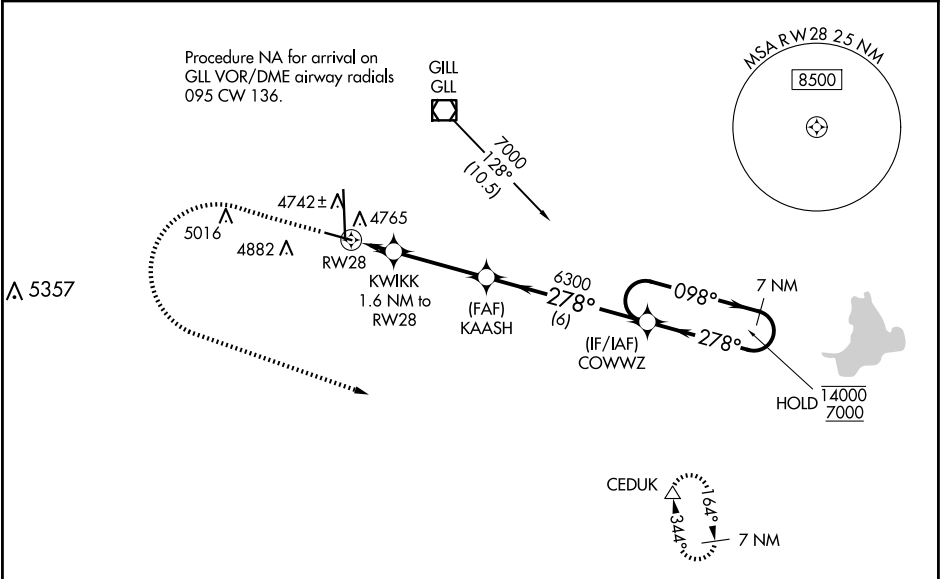

6300 7000 CEDUK		VGSi and RNAV glidepath not coincident (VGSi angle 3.00/TCH 27).	
*LNAV only		7 NM Holding Pattern	
*KWK 1.6 NM to RW28		GP 3.00° TCH 50	
RW28		5200	
1.6 NM		3.5 NM	
6 NM		7 NM	
CATEGORY		A B C D	
LPV DA		4850-¾ 200 (200-¾)	
LNAV/VNAV DA		4976-1 326 (300-1)	
LNAV MDA		5080-1 430 (400-1) 5080-1¼ 430 (400-1¼)	
CIRCLING		5120-1 423 (500-1) 5200-1 503 (600-1) 5200-1½ 503 (600-1½) 5380-2¼ 683 (700-2¼)	