

LOC I-SBD	APP CRS	Rwy Idg	10000
109.3	057°	TDZE	1103
		Apt Elev	1159

LOC Y RWY 6

SAN BERNARDINO INTL (SBD)


⚠

Circling NA northwest of Rwy 6-24. When local altimeter not received, use Ontario altimeter setting and increase all MDA 80 feet; increase S-LOC Cat B and Circling Cat B visibility ¼ SM.

MISSED APPROACH:

Climb to 2700 then climbing right turn to 6000 direct PDZ VORTAC and hold, continue climb-in-hold to 6000.

D-ATIS 124.175	SOCAL APP CON 127.0 318.2	SAN BERNARDINO TOWER ★ 119.45 (CTAF) 0	GND CON 121.8	UNICOM 122.975
-------------------	------------------------------	---	------------------	-------------------

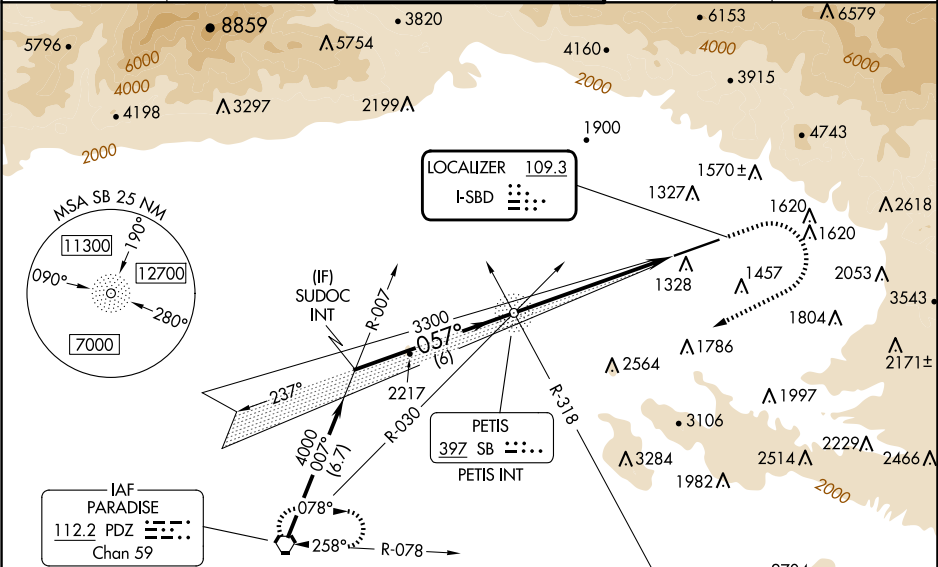

Procedure NA for arrival on PDZ VORTAC
airway radials 012 CW 030.

ELEV 1159	D	TDZE 1103
-----------	---	-----------

TWR

0.7% UP

0.8% DOWN

10000 X 200

057°

HIRL Rwy 6-24

REIL Rwy 6 and 24

FAF to MAP 6.1 NM

Knots	60	90	120	150	180
Min:Sec	6:06	4:04	3:03	2:26	2:02

CIRCLING

2020-1¼	861 (900-1¼)	2060-3	2640-3
901 (1000-3)	1481 (1500-3)		

SUDOC INT

VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 52).

SB NDB PETIS INT

4000

057°

3300

3.33°

TCH 52

6 NM

6.1 NM

2700

6000

PDZ

CATEGORY	A	B	C	D
S-6	2020-1¼	917 (900-1¼)	2060-3	957 (1000-3)
CIRCLING	2020-1¼	861 (900-1¼)	2060-3	2640-3
			901 (1000-3)	1481 (1500-3)