

LOC/DME I-EEI
110.35
Chan 40 (Y)

APP CRS
006°

Rwy Ldg
TDZE **896**
Apt Elev **896**

ILS or LOC RWY 36R

CINCINNATI/NORTHERN KENTUCKY INTL (CVG)

RNP APCH - GPS. From BRCAT or RUPPP or FECTA or SPOOD or DAWGY.
DME or RADAR required. RADAR required for procedure entry at KYKAT.

Simultaneous approach authorized.
For inop ALS, increase S-LOC 36R Cat C and D visibility to 1 3⁄8 SM.

ALS F-2



MISSED APPROACH: Climb to 1500 then climbing right turn to 4000 direct FLM VOR/DME and hold.

D-ATIS
134.375

CINCINNATI APP CON
119.7 363.15 (090°-269°)
123.875 363.15 (270°-089°)

CINCINNATI TOWER
118.975 360.85 (18L/36R)
118.3 (9/27, 18C/36C)
133.325 (18R/36L)

GND CON
121.7

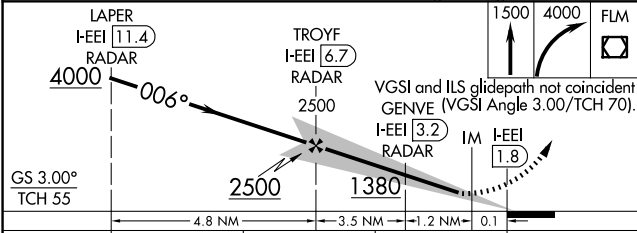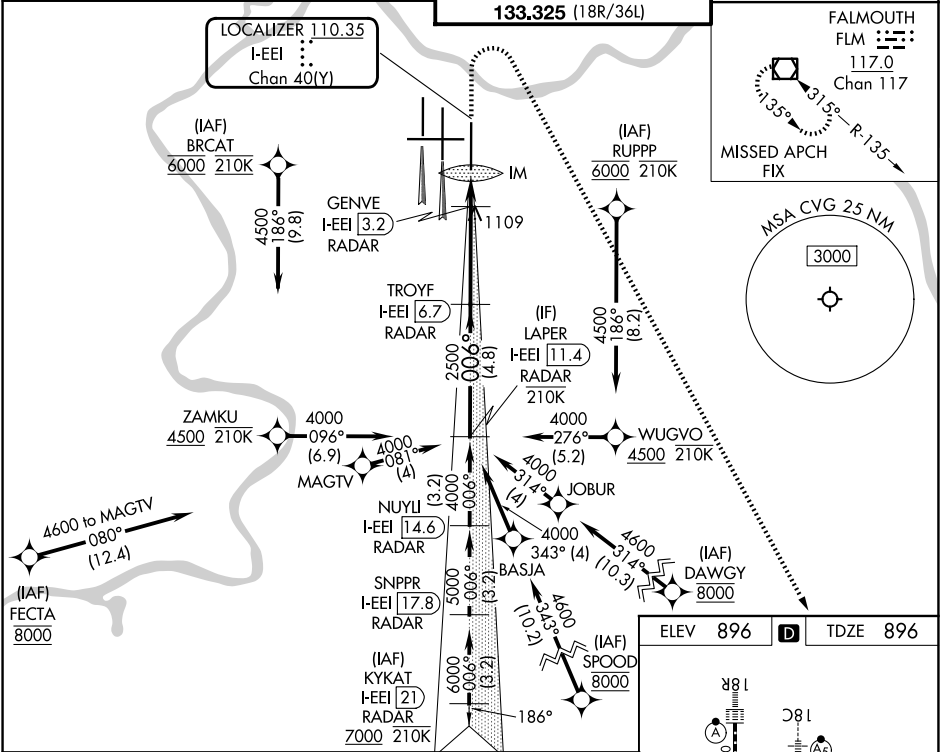

CATEGORY	A	B	C	D
S-ILS 36R	1096/18 200 (200-½)			
S-LOC 36R	1360/24	464 (500-½)	1360/50	464 (500-1)
CIRCLING	1460-1	564 (600-1)	1560-1¾ 664 (700-1¾)	1560-2 664 (700-2)

