

25051

LOC/DME I-UDL <u>110.7</u> Chan 44	APP CRS 276°	Rwy Idg 8394 TDZE 7 Apt Elev 65
--	------------------------	--

ILS or LOC RWY 28R
FORT LAUDERDALE/HOLLYWOOD INTL (FLL)


DME or RADAR required. RNP APCH - GPS from CRNVL.

T Simultaneous approach authorized. Inop table does not apply to S-ILS 28R. For inop ALS, increase S-LOC 28R Cats C and D visibility to 1 3/4 SM.


MALSR

MISSED APPROACH: Climb to 800 then climbing right turn to 4000 on FLL VOR/DME R-305 to HUKUK INT/FLL 15 DME and hold, continue climb-in-hold to 4000.

D-ATIS 135.0	MIAMI APP CON 133.775 285.6	FORT LAUDERDALE TOWER 119.3 257.8	GND CON 121.4	CLNC DEL 128.4	CPDLC
-----------------	--------------------------------	--------------------------------------	------------------	-------------------	-------

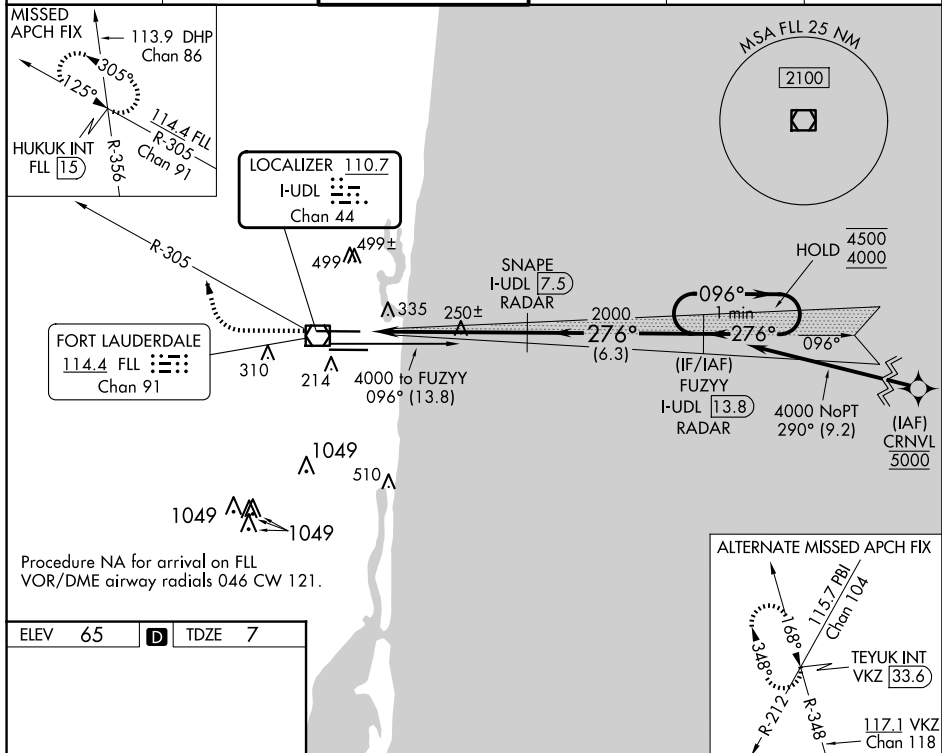

ELEV 65	D	TDZE 7
---------	----------	--------



HIRL Rwy 10L-28R and 10R-28L

FAF to MAP 6.1 NM

Knots	60	90	120	150	180
Min:Sec	6:06	4:04	3:03	2:26	2:02

800 ↑	4000 FL R-305	HUKUK INT	VGS1 and ILS glidepath not coincident (VGS1 Angle 3.00°/TCH 69°)		800 FUZZY I-UDL 13.8 RADAR	One Minute Holding Pattern
CATEGORY	A		B	C	D	
S-ILS 28R	520/24		513 (500-½)	520/55	513 (500-1)	
S-LOC 28R	520-2		735 (800-2)	800-2 ½	800-2 ¼	
CIRCLING	680-1		615 (700-1)	735 (800-2)	800-2 ¼	

FORT LAUDERDALE, FLORIDA

Amdt 12 12AUG21

FORT LAUDERDALE/HOLLYWOOD INTL (FLL)

26°04'N-80°09'W

ILS or LOC RWY 28R

SE-3, 02 OCT 2025 to 30 OCT 2025