

LOC/DME I-ITO
110.7
Chan **44**

APP CRS
259°

Rwy Ldg
TDZE **38**
Apt Elev **38**

ILS or LOC RWY 26
HILO INTL (ITO) (PHTO)


DME required. From KENNZ: RNAV 1-GPS required.

⚠ Circling NA south of Rwy 8-26. Rwy 26 helicopter visibility reduction below ¾ SM NA. Inop table does not apply to S-ILS 26 all Cats. For inop ALS, increase S-LOC 26 Cat A/B visibility to 1 SM, and Cat C/D to 1½ SM.

MALSR
AS

MISSED APPROACH: Climb to 500 then climbing right turn to 3300 on heading 100° and on ITO VORTAC R-079 to CEKOB/ITO VORTAC 10 DME and hold, continue climb-in-hold to 3300.

ATIS 126.4	HILO APP CON ★ 119.7 269.2	HILO TOWER ★ 118.1(CTAF) 0 263.1	GND CON 121.9
----------------------	--------------------------------------	--	-------------------------

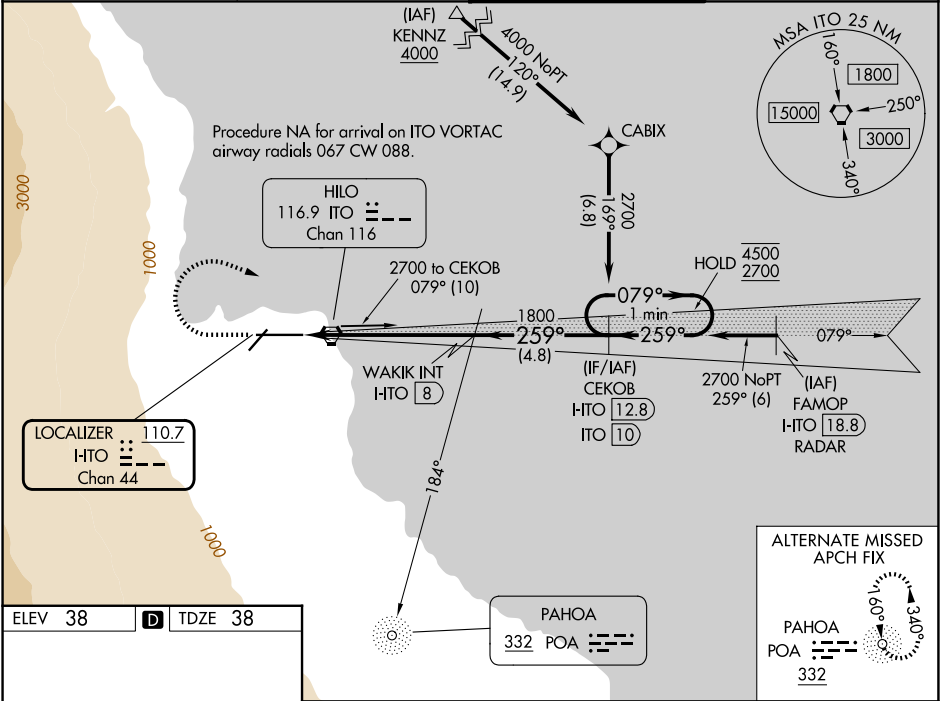

ELEV 38

D

TDZE 38

500

3300

↑

hdg 100°

ITO R-079

CEKOB ITO 10

VGSI and ILS glidepath not coincident (VGSI Angle 2.60/TCH 70).

WAKIK INT I-ITO 8

CEKOB I-ITO 12.8 ITO 10

One Minute Holding Pattern

079° → 4500
← 259° 2700

GS 2.60°
TCH 56

Use I-TO DME when on the localizer course.

I-ITO 1.8

*I-TO 2.9

1800

*LOC only

1.1 NM

5.1 NM

4.8 NM

CATEGORY	A	B	C	D
S-ILS 26		288-¾	250 (300-¾)	
S-LOC 26		420-¾	382 (400-¾)	
CIRCLING	500-1 462 (500-1)	540-1 502 (600-1)	840-2¼ 802 (900-2¼)	1320-3 1282 (1300-3)

PAC: 02 OCT 2025 to 27 NOV 2025

PAC: 02 OCT 2025 to 27 NOV 2025