

LOM TU	APP CRS	Rwy Ldg	7150
420	001°	TDZE	347
		Apt Elev	347

NDB RWY 36
TUPELO RGNL (TUP)



⚠ When local altimeter setting not received, use Columbus AFB altimeter setting and increase all MDA 120 feet, increase S-36 Cats C and D visibility ¾ SM and Circling Cats C and D ½ SM. For inop ALS, increase S-36 Cat A and B visibility to 1 SM and Cat C and D to 1 ¾ SM. For inop ALS when using Columbus AFB altimeter setting, increase S-36 Cat A and B visibility to 1 SM and Cat C and D to 1 ¾ SM.

MALSR

A5

MISSED APPROACH:
Climb to 1500 then climbing left turn to 3000 direct TU LOM and hold.


ASOS	MEMPHIS CENTER	TUPELO TOWER ★	GND CON
133.525	128.5 279.55	118.775 (CTAF) 254.275	121.825 254.275

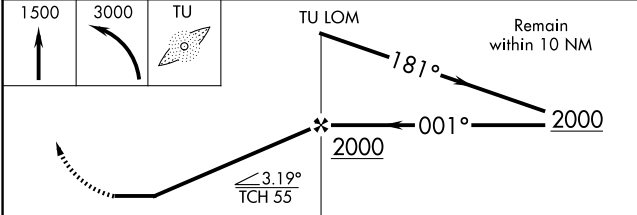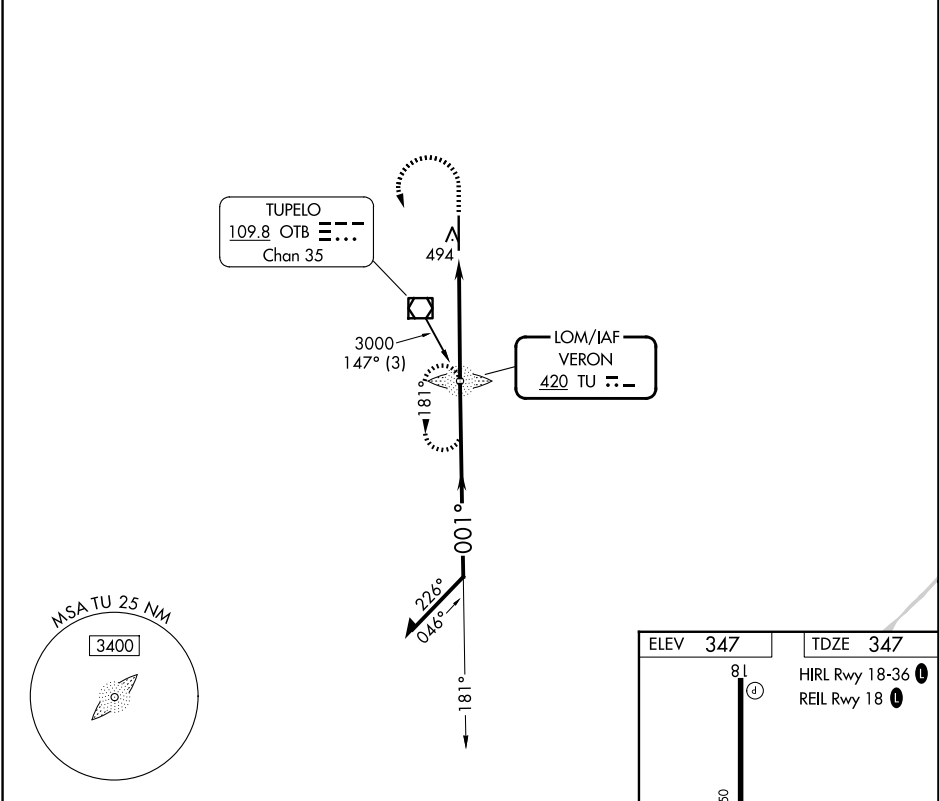

CATEGORY	A	B	C	D
S- 36	840-¾ 493 (500-¾)	840-1 493 (500-1)	900-1½ 553 (600-1½)	1140-2½ 793 (800-2½)
CIRCLING	840-1 493 (500-1)			

FAF to MAP 4.7 NM

Knots	60	90	120	150	180
Min:Sec	4:42	3:08	2:21	1:53	1:34

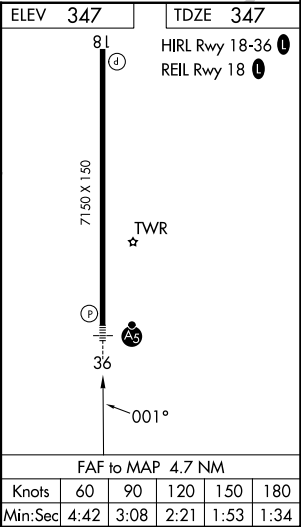

SC-4, 02 OCT 2025 to 30 OCT 2025

SC-4, 02 OCT 2025 to 30 OCT 2025