


LOC I-MQY	APP CRS	Rwy Ldg
111.1	321°	8038
		TDZE
		518
		Apt Elev
		543


ILS or LOC RWY 32

SMYRNA (MQY)

DME required.				MALSR		MISSED APPROACH: Climb to 1500 then climbing right turn to 3000 on heading 060° and on BNA VORTAC R-104 to WORDU/ BNA 18.6 DME and hold.	
NA Circling Rwy 14 NA at night. DME from BNA VORTAC, simultaneous reception of I-MQY and BNA DME required. For Inop ALS, increase S-LOC 32 Cats C/D visibility to 1 SM.							
AWOS-3PT	NASHVILLE APP CON	SMYRNA TOWER ★	GND CON	CLNC DEL	CLNC DEL	UNICOM	
119.125	118.4 360.7	118.5 (CTAF) 233.1	121.4	121.4	121.7 (When twr closed)	122.95	

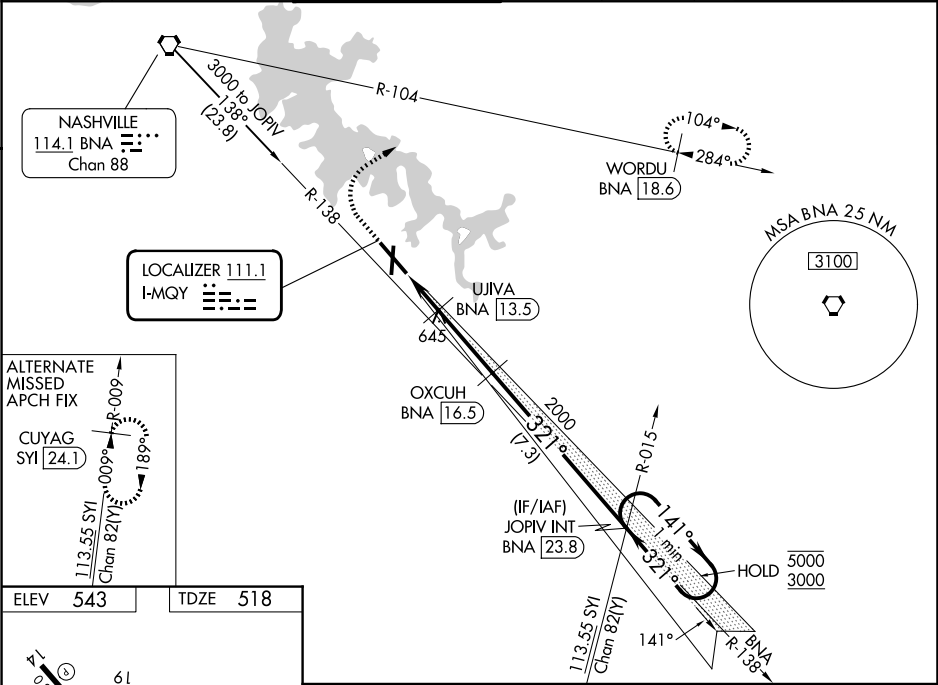

ELEV	543	TDZE	518
------	-----	------	-----

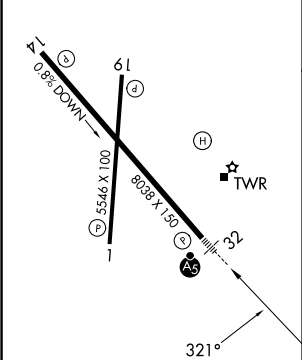

REIL Rwy 14			
HIRL Rwy 14-32			
MIRL Rwy 1-19			
REIL Rwy 1, 19, and 32			
CATEGORY	A	B	C
S-ILS 32	718-1/2	200 (200-1/2)	
S-LOC 32	900-1/2	382 (400-1/2)	900-5/8
CIRCLING	1100-1	1180-1	1260-2
	557 (600-1)	637 (700-1)	717 (800-2)
			1480-3
			937 (1000-3)