


LOC/DME I-RFD	APP CRS	Rwy Ldg
109.3	008°	8199
Chan 30		TDZE 729
		Apt Elev 742

ILS or LOC RWY 1

CHICAGO/ROCKFORD INTL (RFD)

DME or RADAR required.	MALSR	MISSED APPROACH: Climb to 2600 on I-RFD localizer N course (008°) to TODDY/4.6 DME/RADAR and hold, continue climb-in-hold to 2600.
ASR		

ATIS 127.6	ROCKFORD APP CON 121.0 327.0	ROCKFORD TOWER 118.1 290.375	GND CON 121.9 290.375
----------------------	--	--	---------------------------------

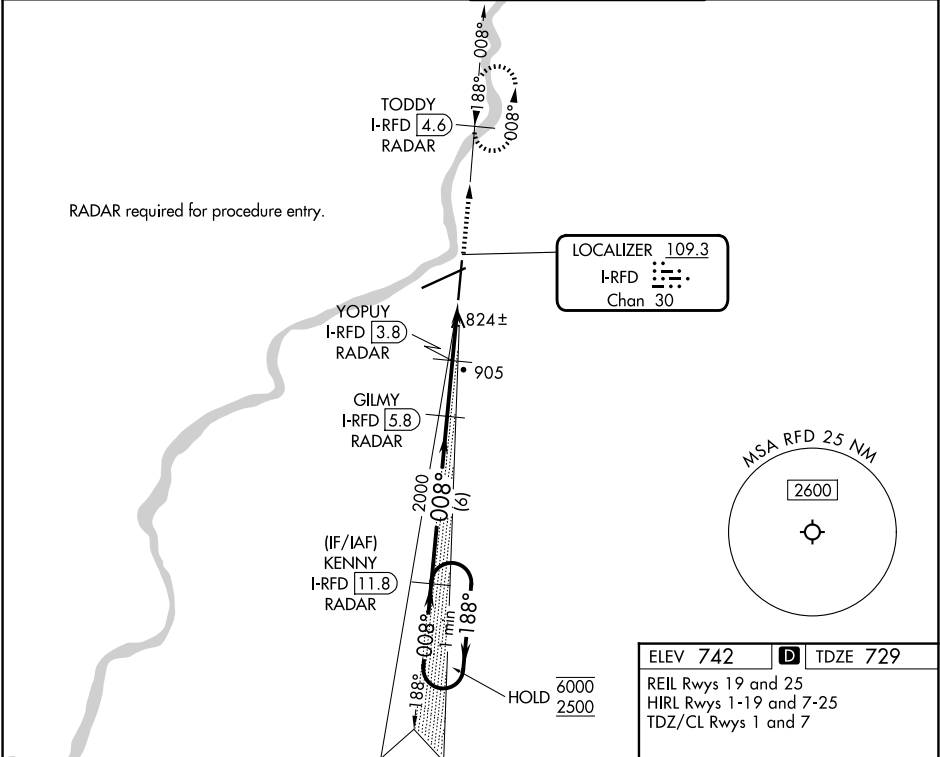

ELEV 742 **D** TDZE 729

REIL Rwy's 19 and 25
HIRL Rwy's 1-19 and 7-25
TDZ/CL Rwy's 1 and 7

One Minute Holding Pattern	KENNY I-RFD 11.8 RADAR	GILMY I-RFD 5.8 RADAR	YOPUY I-RFD 3.8 RADAR	I-RFD 2.6	I-RFD 1.6	TODDY I-RFD 4.6 RADAR
6000 ← 188°	2000	2000	1400	2600		
2500 → 008°						
GS 2.75°						
TCH 62						
	6 NM	2 NM	1.2 NM	1 NM		

CATEGORY	A	B	C	D
S-ILS 1	929/18		200 (200-½)	
S-LOC 1	1080/24	351 (400-½)	1080/30	351 (400-⅝)
CIRCLING	1220-1 478 (500-1)	1280-1 538 (600-1)	1320-1½ 578 (600-1½)	1460-2¼ 718 (800-2¼)

FAF to MAP 4.2 NM

Knots	60	90	120	150	180
Min:Sec	4:12	2:48	2:06	1:41	1:24