WAAS CH 86606 W36B	APP CRS 005°	Rwy Ldg 9801 TDZE 595 Apt Elev 629

RNAV (GPS) RWY 36R
HUNTSVILLE INTL-CARL T JONES FLD (HSV)

RNP APCH - GPS.

Circling NA for Cats C/D/E east of Rwy 18L-36R. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -9°C or above 54°C. Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP required during simultaneous operations. For inop ALS increase LPV Cat E visibility to RVR 4000, LNAV/VNAV Cat E visibility to RVR 5000 and LNAV Cat E visibility to RVR 6000.

ASR

MALSR

MISSED APPROACH: Climb to 3000 direct BISBE and hold.

ATIS	HUNTSVILLE APP CON ★	HUNTSVILLE TOWER ★	GND CON	CLNC DEL	UNICOM
121.25	125.6 354.1	127.6 (CTAF) (L) 350.35	121.9 269.525	120.35	122.95

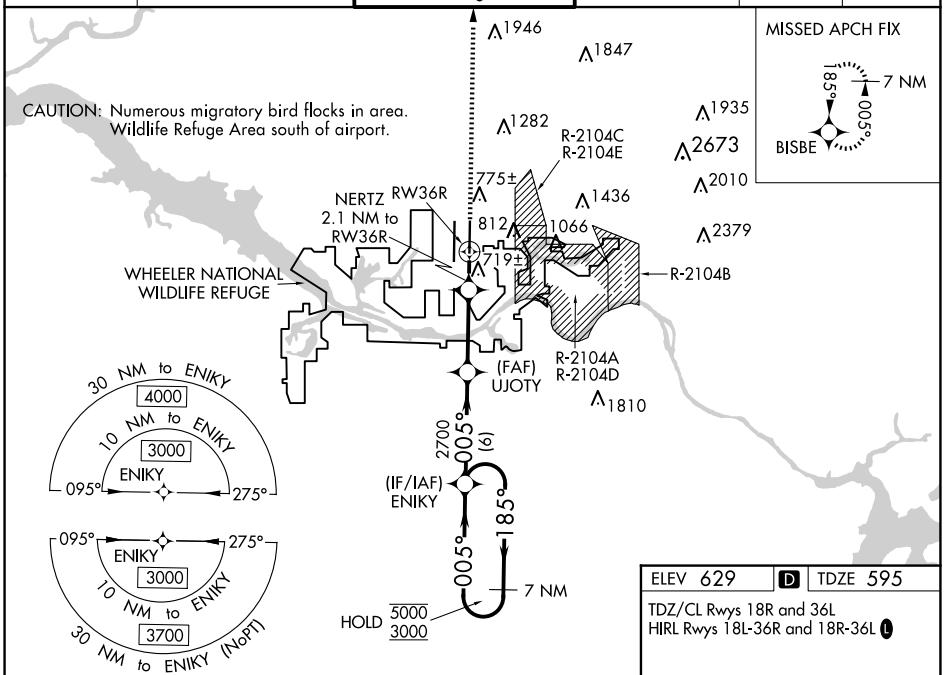

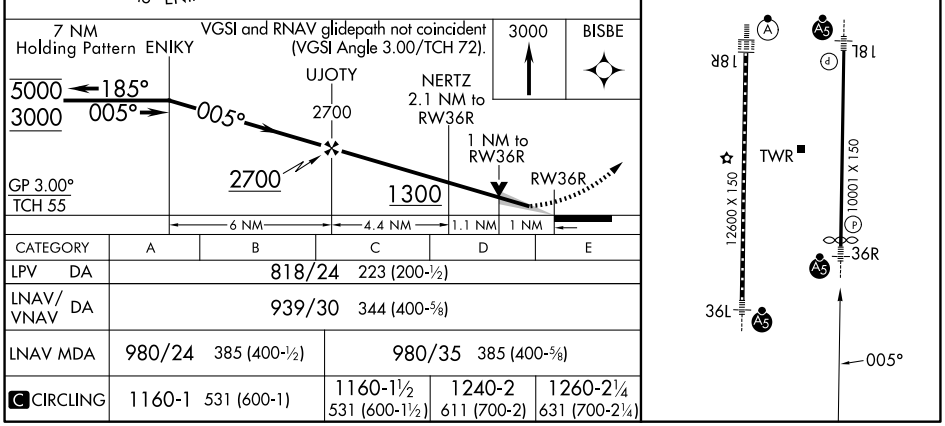

CATEGORY	A	B	C	D	E
LPV DA	818/24 223 (200-½)				
LNAV/VNAV DA	939/30 344 (400-⅝)				
LNAV MDA	980/24 385 (400-½)		980/35 385 (400-⅝)		
(C) CIRCLING	1160-1 531 (600-1)		1160-1½ 531 (600-1½)	1240-2 611 (700-2)	1260-2¼ 631 (700-2¼)

ELEV 629 (D) TDZE 595

TDZ/CL Rwys 18R and 36L
HIRL Rwys 18L-36R and 18R-36L (L)

SE-4, 02 OCT 2025 to 30 OCT 2025