

WAAS CH 97525 W31A	APP CRS 313°	Rwy Ldg 4501 TDZE 725 Apt Elev 727
--	------------------------	---


RNAV (GPS) RWY 31
VIRGIL I GRISSOM MUNI (BFR)

RNP APCH - GPS.

T When local altimeter setting not received, use BMG altimeter setting and increase all MDAs 80 feet and LNAV visibility Cat C/D $\frac{1}{4}$ SM, and LP visibility Cat C/D $\frac{1}{4}$ SM, and Circling visibility Cat C/D $\frac{1}{4}$ SM. Procedure NA at night. Rwy 31 helicopter visibility reduction below 1 SM NA.


MISSED APPROACH:
Climb to 2500 direct
KOXVU and hold.


AWOS-3PT 119.125	LOUISVILLE APP CON 123.675 327.0	UNICOM 122.8 (CTAF) L
----------------------------	--	---------------------------------

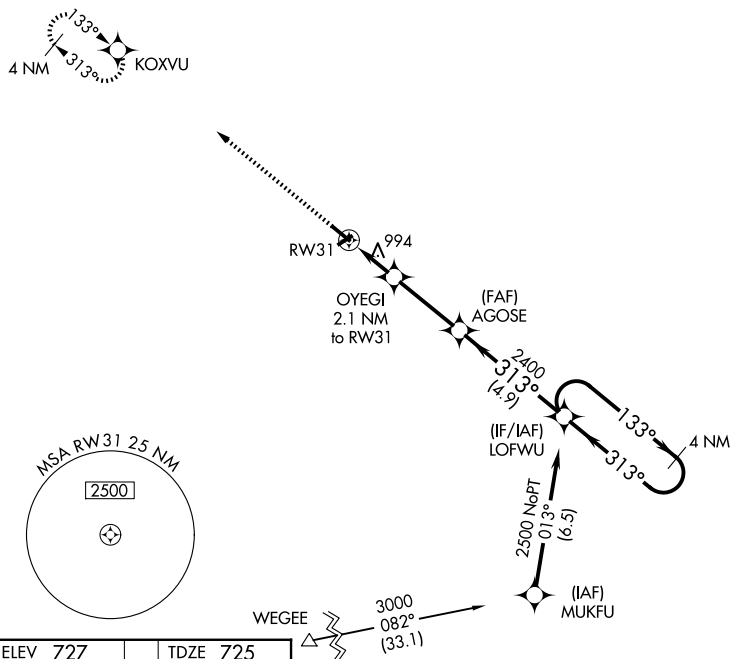

ELEV 727		TDZE 725
----------	--	----------

Procedure NA for arrivals
at WEGEE on V305
southwest bound.



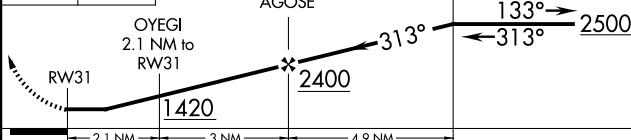2500 ↑	KOXVU 	Visual Segment - Obstacles.		4 NM Holding Pattern	
					
CATEGORY	A	B	C	D	
LP MDA	1260-1	535 (600-1)	1260-1½	535 (600-1½)	
LNAV MDA	1260-1	535 (600-1)	1260-1½	535 (600-1½)	
CIRCLING	1300-1	573 (600-1)	1380-1¾ 653 (700-1¾)	1380-2 653 (700-2)	