

WAAS CH 77713 W06A	APP CRS 061°	Rwy Idg TDZE Apt Elev	4000 786 786
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 6

SENECA COUNTY (16G)

RNP APCH.


▼

▲ NA


Circling to Rwy 24 NA at night. Baro-VNAV NA when using Findlay altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter setting not received, use Findlay altimeter setting and increase all DA/MDA 60 feet, increase LPV all Cats ¼ SM and LNAV and Circling Cat C visibility ¼ SM.

MISSED APPROACH:
Climb to 2400 direct
VOBRY and hold.

AWOS-3 127.175	FDY ASOS 132.85	TOLEDO APP CON 120.8 317.55	UNICOM 123.0 (CTAF) 0
--------------------------	---------------------------	---------------------------------------	--

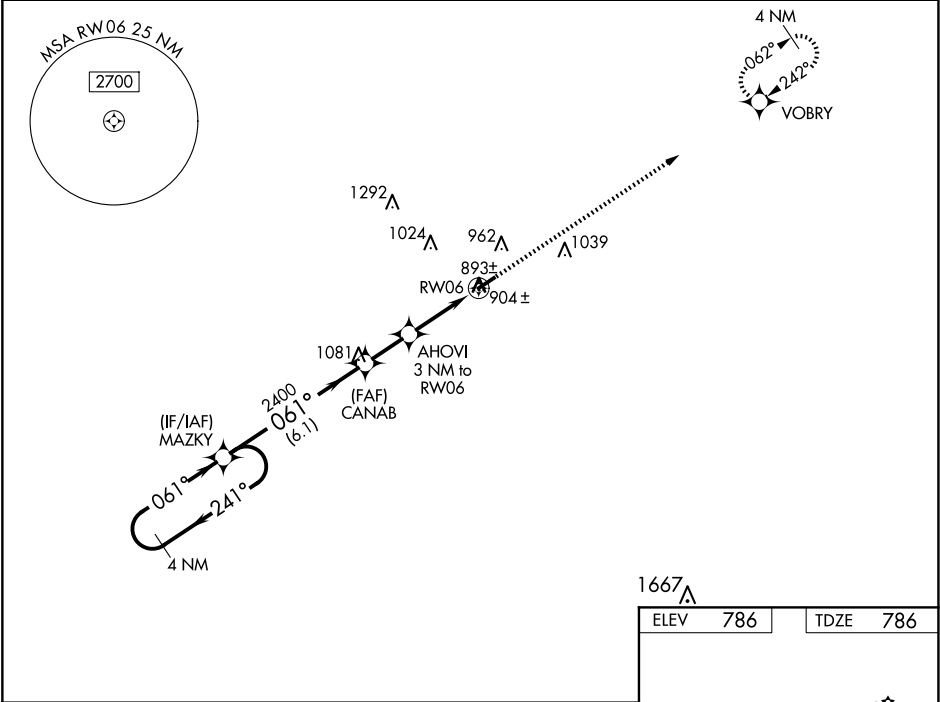

4 NM Holding Pattern		MAZKY	CANAB	AHOVI 3 NM to RW06	2400 VOBRY
2400 ← 241° 061° →		061°	2400	*1780	*LNAV only.
GP 3.00° TCH 38		6.1 NM	1.9 NM	3 NM	
CATEGORY	A	B	C	D	
LPV DA	1137-1¼		351 (400-1¼)	NA	
LNAV/VNAV DA	1174-1½		388 (400-1½)	NA	
LNAV MDA	1160-1		374 (400-1)	NA	
CIRCLING	1280-1 494 (500-1)		1340-1½ 554 (600-1½)	NA	

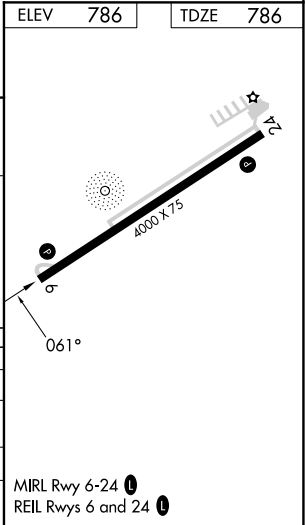

EC-2, 02 OCT 2025 to 30 OCT 2025

EC-2, 02 OCT 2025 to 30 OCT 2025