

WAAS
CH **49144**
W14A

APP CRS
140°

Rwy Ldg
TDZE **181**
Apt Elev **187**

RNAV (GPS) RWY 14


STATESBORO-BULLOCH COUNTY (TBR)

RNP APCH-GPS.

⚠ Circling to Rwy 6/24 NA at night. Baro-VNAV and VDP NA when using Sylvania altimeter setting.
⚠ Rwy 14 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. When local altimeter setting not received, use Sylvania altimeter setting and increase LPV DA to 525 feet and all visibilities ¾ SM. Increase LNAV/VNAV DA to 547 feet; increase all MDAs 40 feet and LNAV visibility Cat C/D ¼ SM, and Circling visibility Cat C ¼ SM.

MISSED APPROACH:
Climb to 2600 direct HENUT and hold.

AWOS-3 119.025	SAVANNAH APP CON ★ 118.4 307.225	UNICOM 122.725 (CTAF) 0
--------------------------	--	-----------------------------------

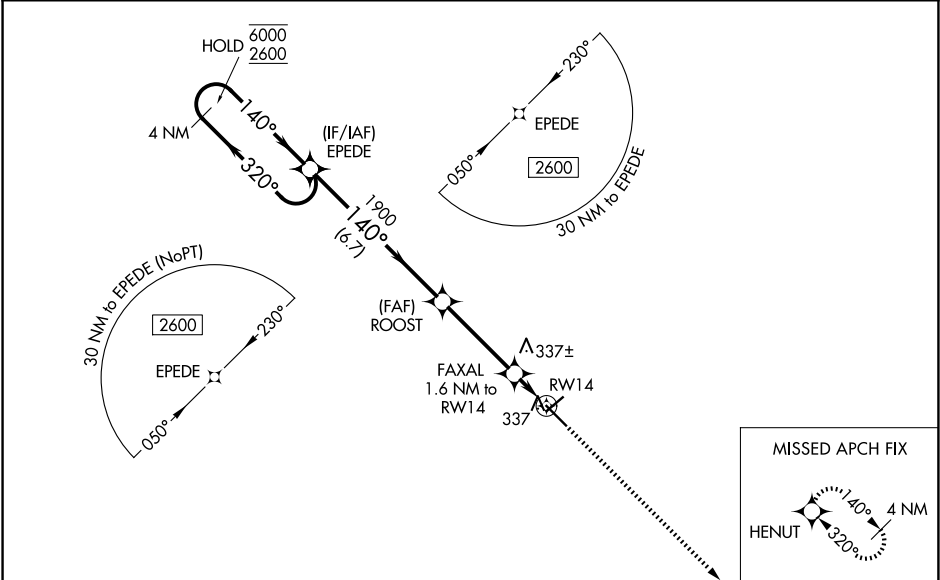

ELEV 187 [D] TDZE 181

VGSI and RNAV glidepath not coincident (VGSI Angle 4.00/TCH 42).

4 NM Holding Pattern

GP 3.00° TCH 45

6000 ← 320° 140° → 2600

1900 740

6.7 NM 3.6 NM 0.7 NM 0.9 NM

2600 HENUT

140°

4382 X 100

6000 X 100

0.4 % UP

HIRL Rwy 14-32 0

CATEGORY	A	B	C	D
LPV DA	496-7⁄8 315 (400-7⁄8)			
LNAV/VNAV DA	518-1 337 (400-1)			
LNAV MDA	600-1 419 (500-1)	600-1 1⁄8 419 (500-1 1⁄8)		
CIRCLING	640-1 453 (500-1)	740-1 553 (600-1)	840-1 3⁄4 653 (700-1 3⁄4)	860-2 1⁄4 673 (700-2 1⁄4)