

WAAS CH 57903 W08A	APP CRS 083°	Rwy Idg TDZE Apt Elev	5102 3260 3279
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 8
SEARLE FLD (OGA)

RNP APCH.


▼

▲

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C or above 54°C. When local altimeter setting not received, use Imperial altimeter setting and increase all DA 86 feet and all MDA 100 feet, increase LPV all Cats visibility 1/8 SM, LNAV/VNAV all Cats and Circling Cat B visibility 1/4 SM. Baro-VNAV NA when using Imperial altimeter setting.

MISSED APPROACH:
Climb to 5200 direct TUKWY and hold.

AWOS-3 121.275	DENVER CENTER 132.7 397.85	UNICOM 122.8 (CTAF) 0
--------------------------	--------------------------------------	---------------------------------

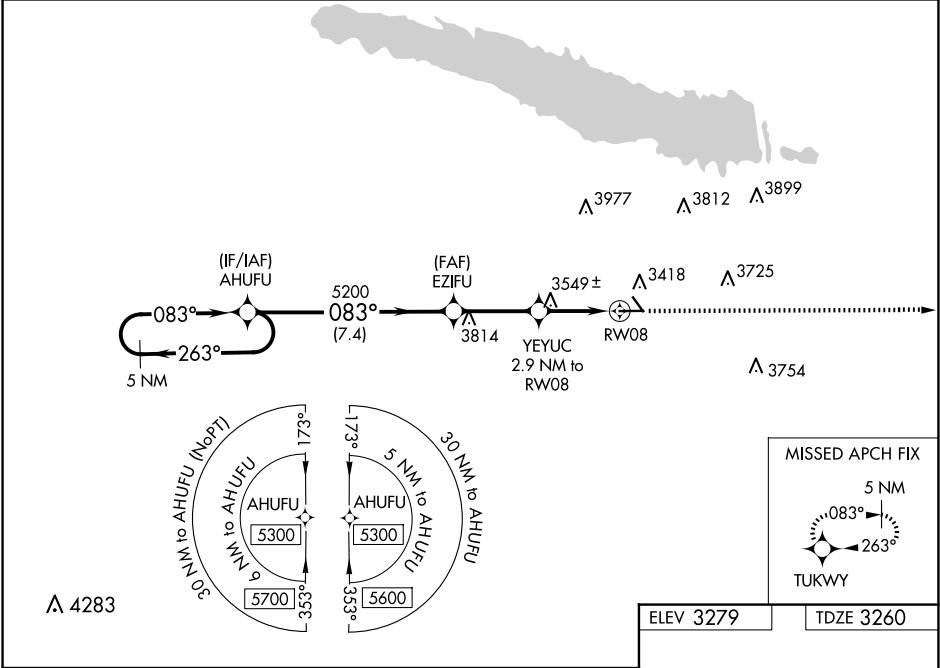

5 NM Holding Pattern		AHUFU		EZIFU		5200 TUKWY	
5300 ← 263°		083° →		083°		* LNAV only.	
GP 3.00°		TCH 40		5200		YEYUC 2.9 NM to RW08	
				*4200		RW08	
		7.4 NM		3.1 NM		2.9 NM	
CATEGORY		A	B	C	D		
LPV DA		3510-1	250 (300-1)	NA			
LNAV/VNAV DA		3865-2¼	605 (600-2¼)	NA			
LNAV MDA		3800-1	540 (600-1)	NA			
CIRCLING		3940-1 661 (700-1)	4000-1 721 (800-1)	NA			