

WAAS CH 53738 W10A	APP CRS 100°	Rwy Ldg TDZE Apt Elev	5001 197 197
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 10


JOHN EDWIN JONES SR FLD/METTER MUNI (MHP)

RNP APCH - GPS.

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. Baro-VNAV NA when using CWV altimeter setting. Rwy 10 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use CWV altimeter setting.

MISSED APPROACH: Climb to 700 then climbing right turn to 3000 direct LOTTS and hold.

AWOS-3PT 120.3	JACKSONVILLE CENTER 132.925 363.2	UNICOM 123.0 (CTAF) 0
--------------------------	---	---------------------------------

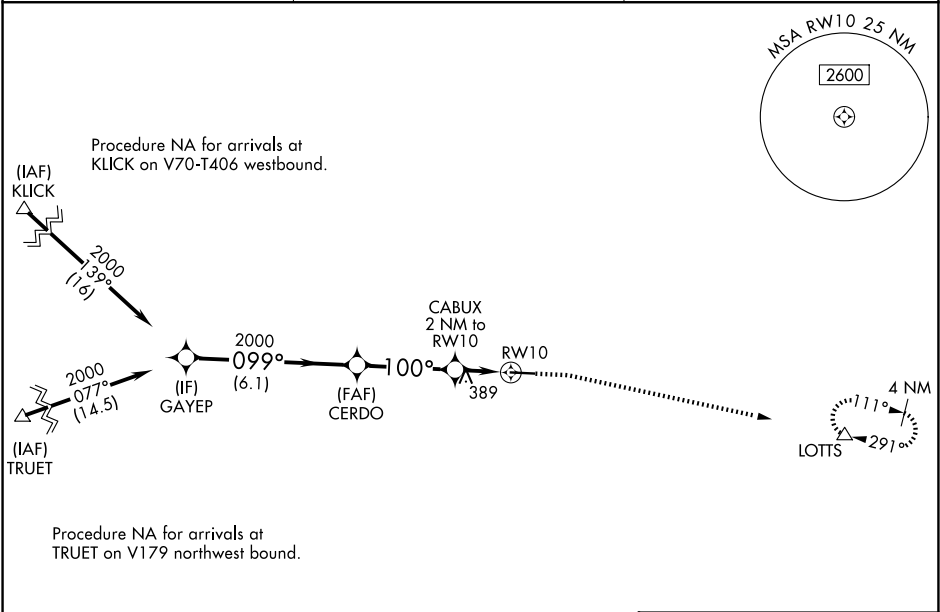

ELEV 197		TDZE 197		
VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 32). Diagram details: GAYEP, CERDO (2000), CABUX (2 NM to RW10), RW10, 100°, 5001 X 75, 10, 28.				
CATEGORY	A	B	C	D
LPV DA	537-1		340 (400-1)	
LNAV/ VNAV DA	494-1		297 (300-1)	
LNAV MDA	700-1 503 (600-1)		700-1 $\frac{3}{8}$ 503 (600-1 $\frac{3}{8}$)	
CIRCLING	820-1 623 (700-1)	880-1 683 (700-1)	1060-2 $\frac{1}{2}$ 863 (900-2 $\frac{1}{2}$)	1060-2 $\frac{3}{4}$ 863 (900-2 $\frac{3}{4}$)
MIRL Rwy 10-28 0				REIL Rwy 10 0

RNAV (GPS) RWY 10

SE-4, 02 OCT 2025 to 30 OCT 2025

SE-4, 02 OCT 2025 to 30 OCT 2025