



|                                        |                        |                             |                                           |
|----------------------------------------|------------------------|-----------------------------|-------------------------------------------|
| WAAS<br>CH <b>82244</b><br><b>W35A</b> | APP CRS<br><b>352°</b> | Rwy Ldg<br>TDZE<br>Apt Elev | <b>4000</b><br><b>2315</b><br><b>2322</b> |
|----------------------------------------|------------------------|-----------------------------|-------------------------------------------|

RNAV (GPS) RWY 35

NESS CITY MUNI (48K)

|                                                                                 |                                                                                                                                                                                                                                                            |                                                       |
|---------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------|
| RNP APCH - GPS.                                                                 |                                                                                                                                                                                                                                                            | MISSED APPROACH: Climb to 4400 direct NESBY and hold. |
|  | Rwy 35 helicopter visibility reduction below 3/4 SM NA. Baro-VNAV NA. Use Hays Rgnl altimeter setting, when not received, use Hill City altimeter setting and increase LPV DA to 2702 feet, increase LNAV/VNAV DA to 2714 feet, increase all MDAs 20 feet. |                                                       |

|                            |                                |                                          |                      |
|----------------------------|--------------------------------|------------------------------------------|----------------------|
| AWOS-3PT<br><b>118.575</b> | HYS AWOS-3PT<br><b>125.525</b> | KANSAS CITY CENTER<br><b>124.4 322.4</b> | CTAF<br><b>122.9</b> |
|----------------------------|--------------------------------|------------------------------------------|----------------------|

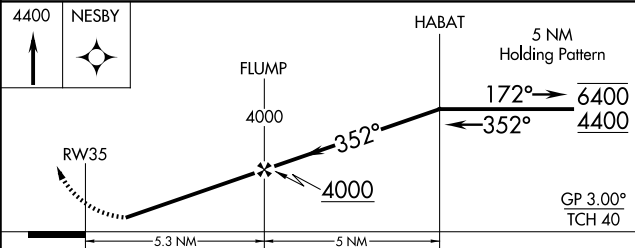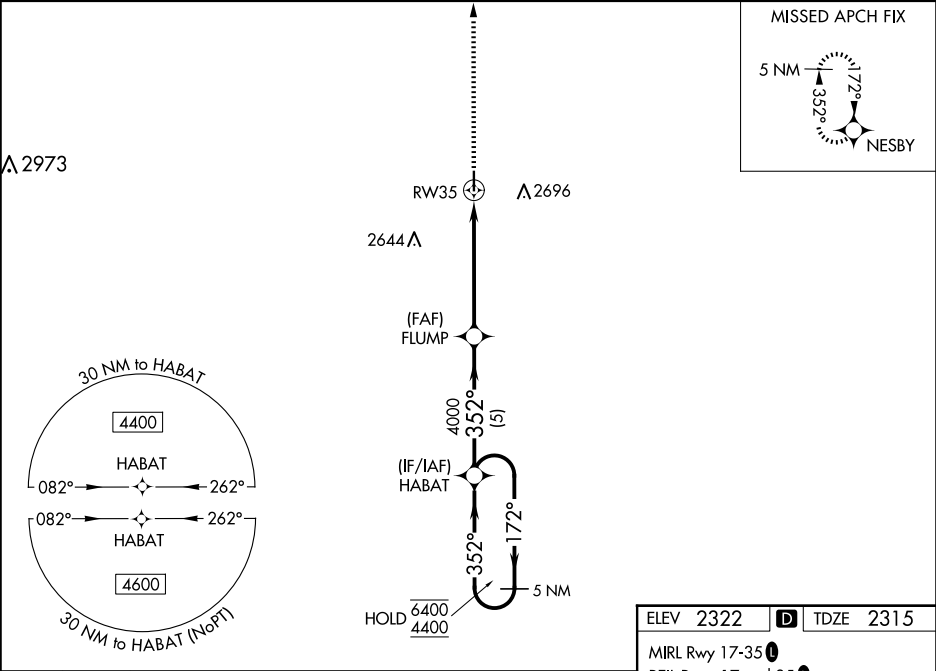

| CATEGORY     | A                     | B                             | C  | D |
|--------------|-----------------------|-------------------------------|----|---|
| LPV DA       | 2696-1 1/8            | 381 (400-1 1/8)               | NA |   |
| LNAV/VNAV DA | 2708-1 1/8            | 393 (400-1 1/8)               | NA |   |
| LNAV MDA     | 2860-1                | 545 (600-1)                   | NA |   |
| CIRCLING     | 3020-1<br>698 (700-1) | 3140-1 1/4<br>818 (900-1 1/4) | NA |   |

