

|                                        |                        |                                                     |
|----------------------------------------|------------------------|-----------------------------------------------------|
| WAAS<br>CH <b>86831</b><br><b>W27A</b> | APP CRS<br><b>266°</b> | Rwy Ldg<br>TDZE <b>6037</b><br>Apt Elev <b>6056</b> |
|----------------------------------------|------------------------|-----------------------------------------------------|

RNAV (GPS) RWY 27

SPANISH PEAKS AIRFIELD (4V1)


▼

▲ NA

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -26°C (-14°F) or above 48°C (118°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Trinidad altimeter setting and increase all DA 119 feet and all MDA 120 feet; increase LPV all Cnts visibility ¼ mile, increase LNAV/VNAV all Cnts and LNAV Cnts C/D visibility ⅜ mile. Baro-VNAV and VDP NA when using Trinidad altimeter setting.

MISSED APPROACH: Climb to 6800 then climbing right turn to 9400 direct JUKEX and hold.

|                          |                                        |                                 |
|--------------------------|----------------------------------------|---------------------------------|
| AWOS-3PT<br><b>123.6</b> | DENVER CENTER<br><b>128.375 379.95</b> | UNICOM<br><b>122.8 (CTAF) 0</b> |
|--------------------------|----------------------------------------|---------------------------------|

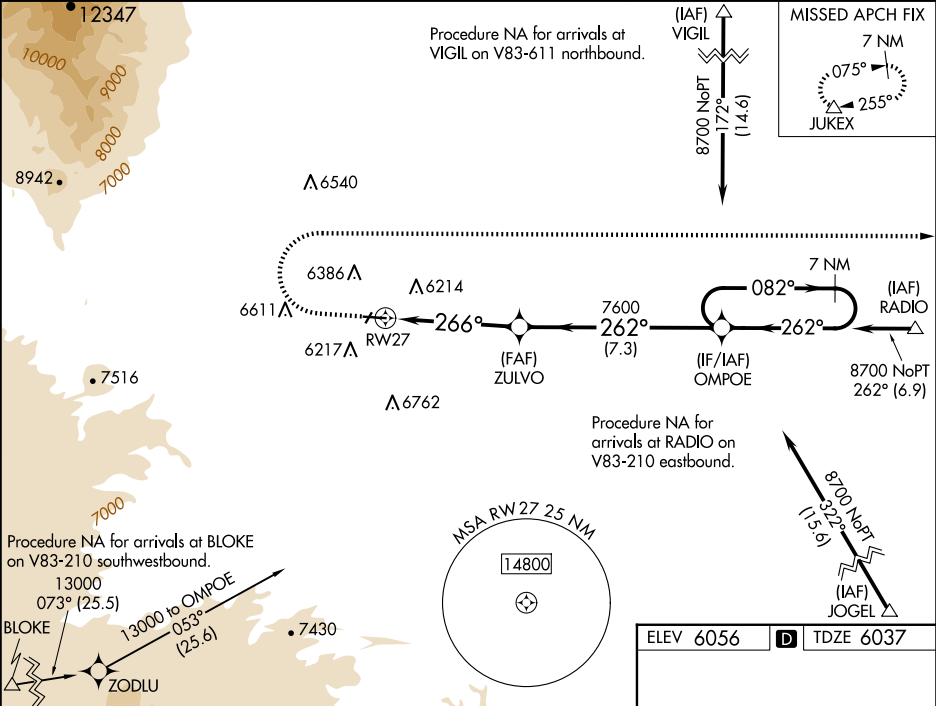

|              |                      |                      |                      |                      |
|--------------|----------------------|----------------------|----------------------|----------------------|
| 6800         | 9400                 | JUKEX                | OMPOE                | 7 NM Holding Pattern |
| *LNAV only   | *1.4 NM to RW27      |                      |                      |                      |
| RW27         |                      |                      |                      |                      |
| 1.4 NM       | 3.4 NM               | 7.3 NM               |                      |                      |
| CATEGORY     | A                    | B                    | C                    | D                    |
| LPV DA       | 6287-1 250 (300-1)   |                      |                      |                      |
| LNAV/VNAV DA | 6525-1⅓ 488 (500-1⅓) |                      |                      |                      |
| LNAV MDA     | 6520-1 483 (500-1)   | 6520-1⅓ 483 (500-1⅓) |                      |                      |
| ◼ CIRCLING   | 6720-1 664 (700-1)   | 7080-3 1024 (1100-3) | 7120-3 1064 (1100-3) |                      |

ELEV 6056 TDZE 6037

GP 3.00° TCH 45

MIRL Rwy 9-27 0

266°

4715 X 75

0.6% UP

27