

WAAS CH 42840 W31A	APP CRS 314°	Rwy Ldg TDZE 669 Apt Elev 674	3019
--	------------------------	---	-------------

RNAV (GPS) RWY 31

ANDREWS UNIVERSITY AIRPARK (C20)


▼

NA

Rwy 31 helicopter visibility reduction below 1 SM NA. DME/DME RNP-0.3 NA. Procedure NA at night. Use Benton Harbor altimeter setting; when not received, use South Bend Intl altimeter setting and increase all MDA 40 feet. Increase LP and LNAV Cats C/D visibility 1/8 SM and Circling Cats B/C 1/4 SM.

MISSED APPROACH:
Climb to 3000 direct STNGG and hold.

SOUTH BEND APP CON ★ 118.55 257.8	UNICOM 122.7 (CTAF) 0
---	---------------------------------

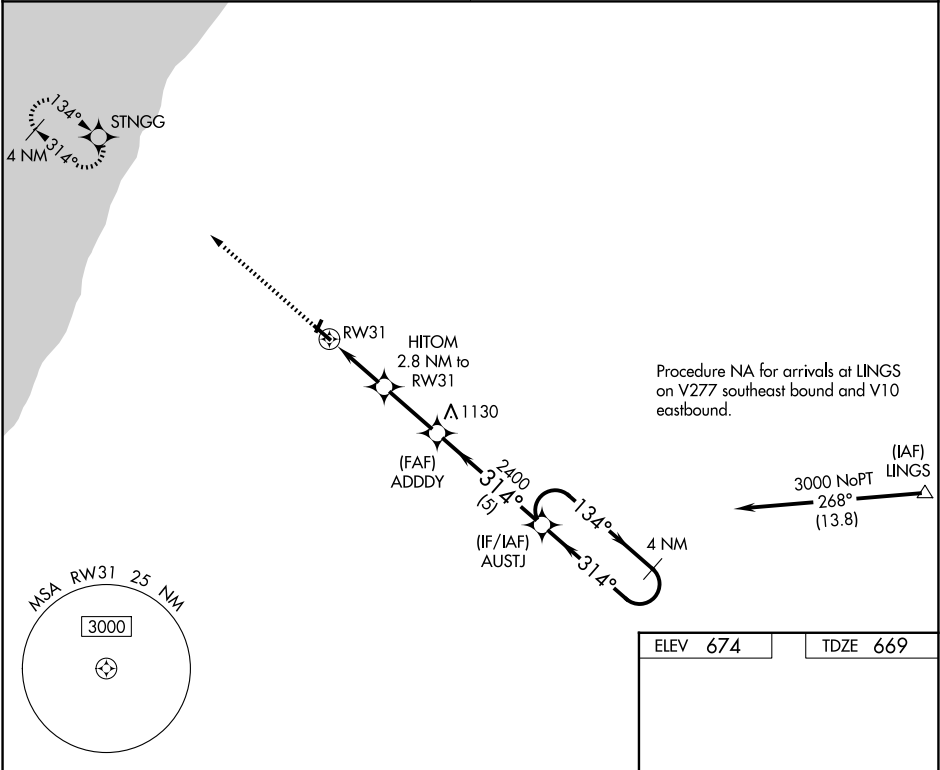

ELEV **674**

TDZE **669**

IRL Rwy 13-31 0

3000		STNGG			
RW31		HITOM 2.8 NM to RW31		AUSTJ 4 NM Holding Pattern	
1600		2400		3000	
2.8 NM		2.5 NM		5 NM	
CATEGORY	A	B		C	D
LP MDA	1100-1	431 (500-1)		1100-1¼	431 (500-1¼)
LNAV MDA	1160-1	491 (500-1)		1160-1⅜	491 (500-1⅜)
CIRCLING	1620-1¼	946 (1000-1¼)		1620-2¾ 946 (1000-2¾)	1620-3 946 (1000-3)