



LOC/DME I-PKU 111.75 Chan 54 (Y)	APP CRS 275°	Rwy Ldg TDZE 998 Apt Elev 1026
--	------------------------	--

ILS or LOC RWY 28
HARTSFIELD/JACKSON ATLANTA INTL (ATL)

RNAV 1-GPS or RADAR required for procedure entry. From TERII: RNAV 1-GPS required. DME or RADAR required.		ALSf-2	MISSED APPROACH: Climb to 1500 then climbing left turn to 3000 on heading 216° and LGC VORTAC R-062 to PAJVO/LGC 28 DME/RADAR and hold.
Simultaneous approach authorized.			

D-ATIS ARR 119.65	ATLANTA APP CON	ATLANTA TOWER					ALL RWYS	GND CON	ALL RWYS
DEP 125.55	127.9 379.9	119.1 125.325 123.85 119.3 119.5 254.4	8L-26R	8R-26L	9L-27R	9R-27L	10-28	(8L-26R, 8R-26L) (9L-27R, 9R-27L)	10-28
								121.9 121.75 121.65 254.4	

CLNC DEL 118.1	CPDLC
-----------------------------	-------

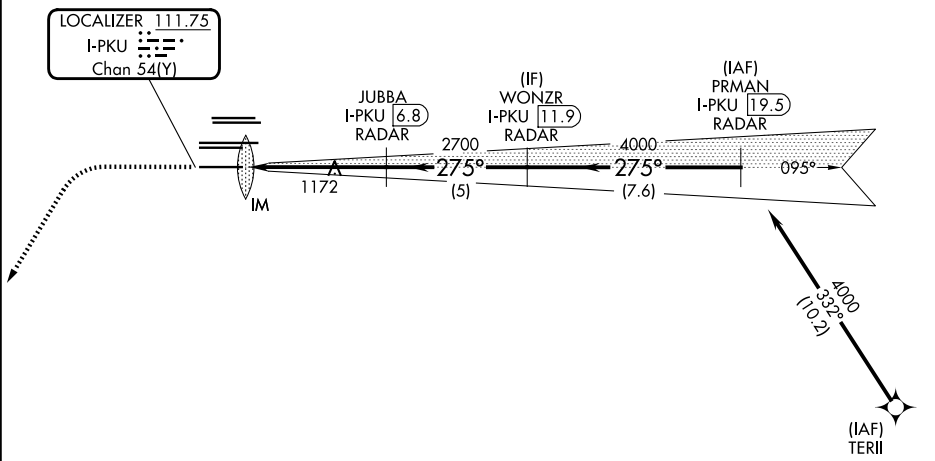

1500 ↑ hdg 216°	LGC R-062	PAJVO LGC 28	VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 72).			
			JUBBA I-PKU 6.8 RADAR	WONZR I-PKU 11.9 RADAR	PRMAN I-PKU 19.5 RADAR	
			2700	4000	4000	
			0.1	1.1 NM	4 NM	5 NM
CATEGORY	A	B	C	D		
S-ILS 28	1198/18		200 (200-½)			
S-LOC 28	1440/24	442 (500-½)	1440/45	442 (500-¾)		

ELEV 1026	TDZE 998
HIRL all Rwy's TDZ/CL Rwy's 8L, 9R, 10, 26R, 27L and 28	
FAF to MAP 5.2 NM	
Knots	60 90 120 150 180
Min:Sec	5:12 3:28 2:36 2:05 1:44

SE-4, 30 OCT 2025 to 27 NOV 2025

SE-4, 30 OCT 2025 to 27 NOV 2025