
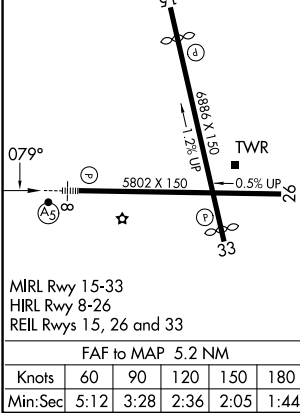


LOC I-BUR 109.5	APP CRS 079°	Rwy Ldg TDZE Apt Elev 5801 727 778
---------------------------	------------------------	--

ILS Y or LOC Y RWY 8
BOB HOPE (BUR)

From MIKEI: RNAV 1-GPS required.					
Localizer unusable within 0.9 NM to thld. Straight-in Rwy 8 at night, Circling to Rwy 33 at night, operational VGSI required, remain on or above VGSI glidepath until threshold. Circling Rwy 26 NA at night and Circling Rwy 33 NA at night for Cat D. Circling NA for Cats A/B/C northeast of Rwy 15 and 26. Circling NA for Cat D east of Rwy 15-33. Inop table does not apply to S-ILS Rwy 8. For inop ALS, increase S-LOC 8 Cats A/B visibility to 1¼ SM. Rwy 8 helicopter visibility reduction below RVR 5000 NA.			MALSR  MISSED APPROACH: Climb to 1800 then climbing right turn to 4600 on heading 210° and VTU VOR/DME R-086 to VTU VOR/DME and hold.		
D-ATIS 134.5	SOCAL APP CON 120.4 360.6 (NORTH) 134.2 338.2 (WEST)	BURBANK TOWER 118.7 254.3	GND CON 123.9 348.6	CLNC DEL 118.0 348.6	CPDLC

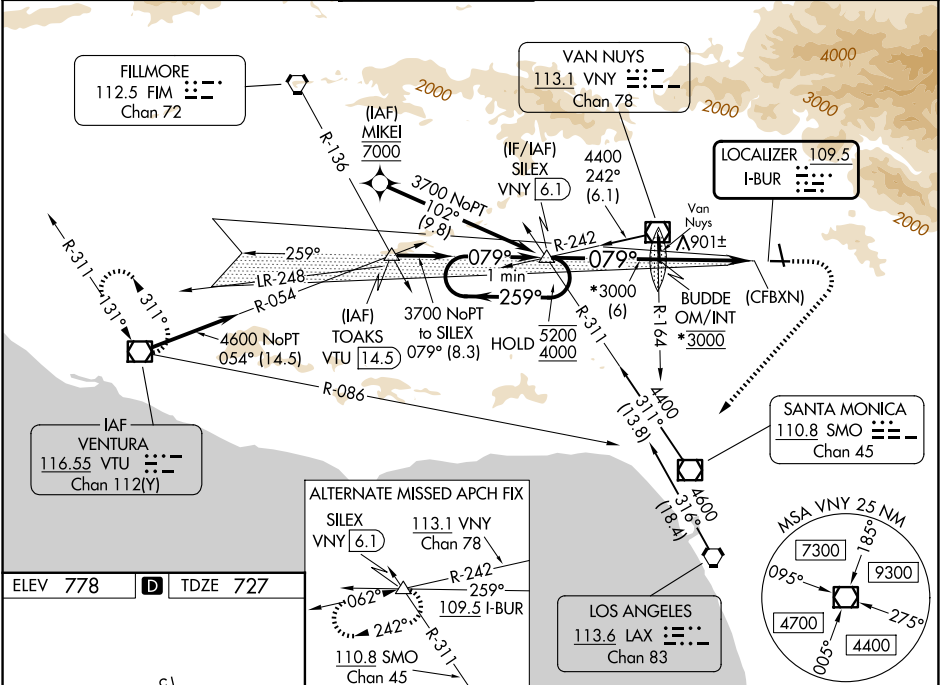

MIRL Rwy 15-33	
HIRL Rwy 8-26	
REIL Rws 15, 26 and 33	
FAF to MAP 5.2 NM	
Knots	60 90 120 150 180
Min:Sec	5:12 3:28 2:36 2:05 1:44

One Minute Holding Pattern				
SILEX VNY (6.1)				
BUDDIE OM/INT				
*LOC only				
1800 4600 VTU VTU				
hdg 210° R-086				
*LOC only				
6 NM 5.2 NM 0.9				
CATEGORY	A	B	C	D
S-ILS 8	1555-2½ 828 (800-2½)			
S-LOC 8	1620/50	893 (900-1)	1620-2	893 (900-2)
CIRCLING	1620-1¼ 842 (900-1¼)	1640-1¼ 862 (900-1¼)	2240-3 1462 (1500-3)	2320-3 1542 (1600-3)

SW-3, 30 OCT 2025 to 27 NOV 2025

SW-3, 30 OCT 2025 to 27 NOV 2025