

WAAS CH 73006 W03A	APP CRS 032°	Rwy Ldg 10165 TDZE 5328 Apt Elev 5344
--	------------------------	--

RNAV (GPS) RWY 3

CASPER/NATRONA COUNTY INTL (CPR)

▼


▲

For inoperative MALSR, increase LPV all Cats visibility to 1 mile.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -25°C (-13°F) or above 38°C (100°F).
DME/DME RNP-0.3 NA.


MALSR

MISSED APPROACH: Climb to 7500
direct KIVSE and via track 022° to
DDY VOR/DME and hold.

ATIS 126.15	CASPER APP CON * 120.65 354.1	CASPER TOWER * 118.3 (CTAF) 0 257.8	GND CON 121.9	CLNC DEL 121.9 257.8	UNICOM 122.95
-----------------------	---	---	-------------------------	--------------------------------	-------------------------

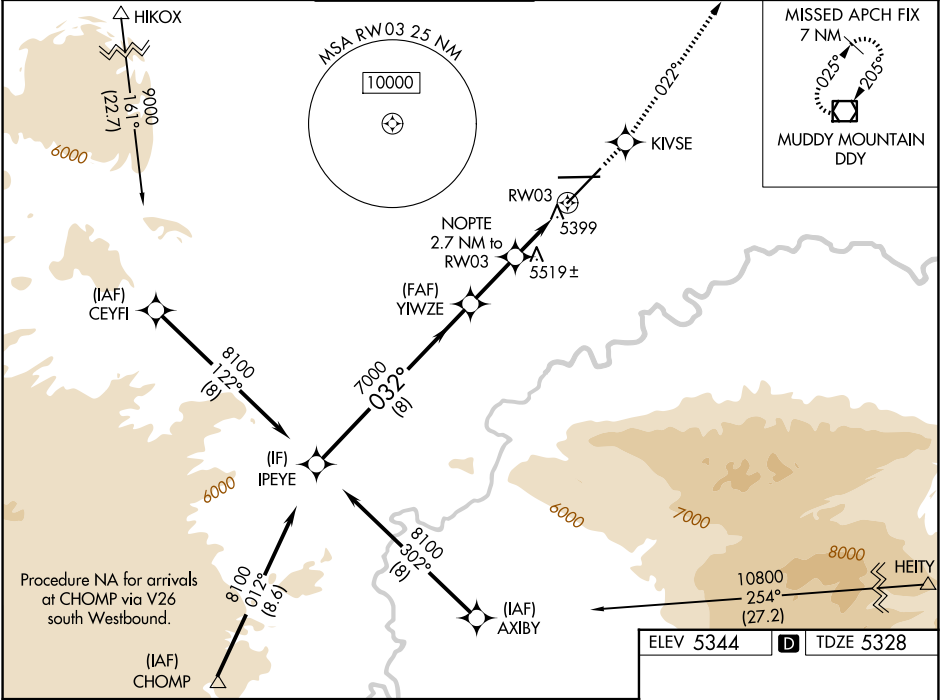

Procedure Turn NA	IPEYE	8100	032°	7000	YWZE	NOPT 2.7 NM to RW03	*1.3 NM to RW03	RW03	*6240	7500	KIVSE	tr 022°	DDY	*LNAV only
GP 3.00°	TCH 52	8 NM	2.3 NM	1.4 NM	1.3 NM									
CATEGORY		A	B	C	D									
LPV	DA		5643/24	315 (300-½)										
LNAV/VNAV	DA		5691/40	363 (400-¾)										
LNAV MDA		5780/24	452 (500-½)	5780/40	452 (500-¾)	5780/50	452 (500-1)							
CIRCLING		5780-1	436 (500-1)	5800-1	456 (500-1)	5860-1½	516 (600-1½)	6200-2¾	856 (900-2¾)					

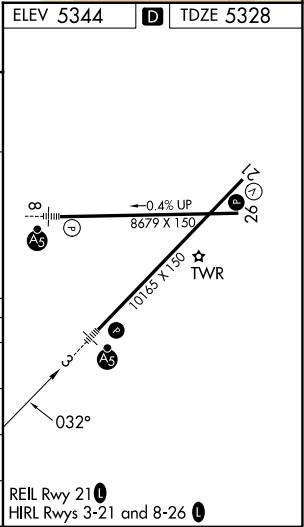

NW-1, 30 OCT 2025 to 27 NOV 2025

NW-1, 30 OCT 2025 to 27 NOV 2025