

RNAV (GPS) RWY 36

APCH CRS	Rwy Idg	5002
357°	TDZE	18
	Arpt Elev	18

[USN]

CORPUS CHRISTI NAS (TRUAX FLD) (KNGP)

RNP APCH

T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (129°F).

MISSED APPROACH: Climb to 600, then climbing right turn to 2000 direct FOLEM and hold.

ATIS ★

127.9 290.9

APP CON

128.675 343.75

NAVY CORPUS TOWER ★

134.85 340.2

GND CON

118.7 257.85

CLNC DE

314.3

ASRA

PAR

105


A1068

Baro-VNAV not authorized when local altimeter not available.


Northbound arrivals on V70-407 and V13-20-163 require turn in holding at CRP VORTAC (See L-20), or RADAR vectors. Holding at CRP not authorized for TACAN users.

When local altimeter setting not received,
use Corpus Christi (CRP) Intl altimeter setting.

EMERG SAFE ALT 100 NM 11,100



VDP not authorized when using Corpus Christi (CRP) Intl altimeter setting. 4 NM Holding Pattern

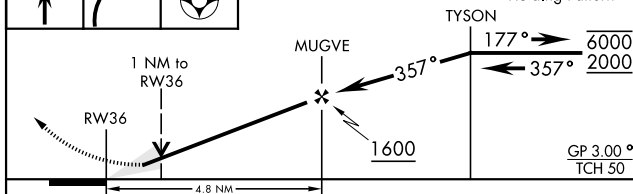

CATEGORY	A	B	C	D
LNAB MDA	400-1 382 (400-1)		400-1½ 382 (400-1½)	
LNAB/VNAB DA	400-1½ 382 (400-1½)			
C CIRCLING	460-1 442 (500-1)	480-1 462 (500-1)	520-1½ 502 (600-1½)	580-2 562 (600-2)
CORPUS CHRISTI (CRP) INTL ALTIMETER SETTING				
LNAB MDA	440-1 422 (500-1)		440-1¼ 422 (500-1¼)	
C CIRCLING	500-1 482 (500-1)		540-1½ 522 (600-1½)	620-2 602 (700-2)

CORPUS CHRISTI, TEXAS

27°42'N-97°17'W

CORPUS CHRISTI NAS (TRUAX FLD) (KNGP)

Amdt 2 30NOV23

RNAV (GPS) RWY 36

SC-3, 30 OCT 2025 to 27 NOV 2025