



WAAS CH 70314 W12A	APP CRS 121°	Rwy Idg TDZE 1289 Apt Elev 1289
--	------------------------	---

RNAV (GPS) RWY 12

HURON RGNL (HON)

RNP APCH.	MALSR 	MISSED APPROACH: Climb to 3000 direct CAVOR and on track 121° to FARVA and hold.
Circling Rwy 18, 36 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. For inop ALS, increase LNAV/VNAV all CATs visibility to 1½ SM and LNAV Cat C/D to 1¾ SM.		

ASOS 118.125	MINNEAPOLIS CENTER 126.25 339.8	UNICOM 123.0 (CTAF) 0
------------------------	---	---------------------------------

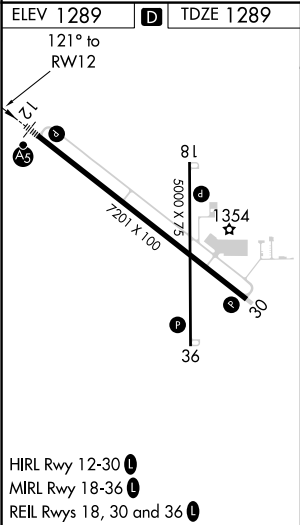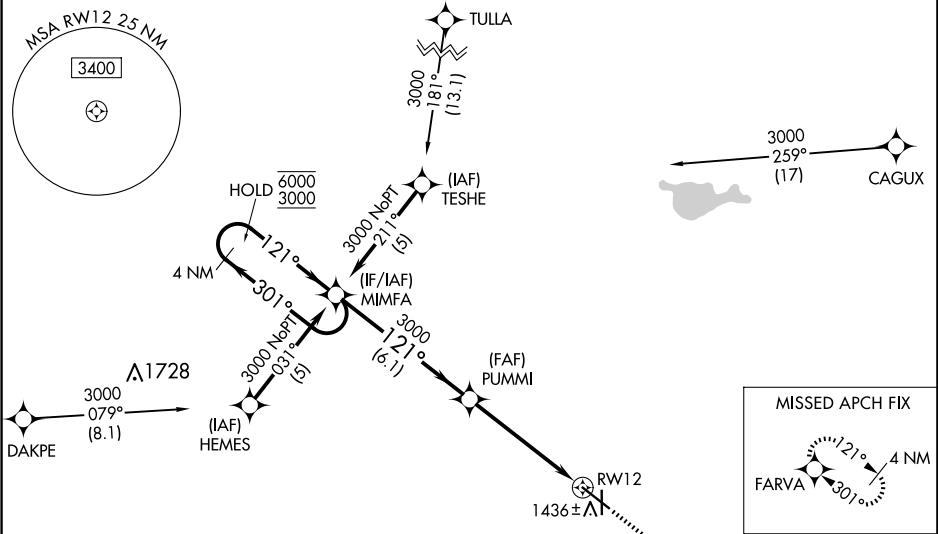

4 NM Holding Pattern		MIMFA	PUMMI	3000	CAVOR	FARVA
6000 ← 301°		121° →	3000	↑	tr 121°	
3000						
GP 3.00°						
TCH 50						
		6.1 NM	3.7 NM	1.4 NM		
CATEGORY	A	B	C	D		
LPV DA	1489-½ 200 (200-½)					
LNAV/ VNAV DA	1699-¾ 410 (500-¾)					
LNAV MDA	1780-½ 491 (500-½)		1780-1 491 (500-1)			
 CIRCLING	1820-1 531 (600-1)		1920-1¾ 631 (700-1¾)		1980-2¼ 691 (700-2¼)	