

LUBBOCK, TEXAS

AL-241 (FAA)


23222

WAAS CH 40028 W17A	APP CRS 174°	Rwy Idg TDZE 3282 Apt Elev 3282
--	------------------------	---


RNAV (GPS) Y RWY 17R
LUBBOCK PRESTON SMITH INTL (LBB)

RNP APCH	For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -12°C or above 51°C. For inop ALS increase LPV Cat E visibility to RVR 4000, LNAV/VNAV Cat E visibility to RVR 5000 and LNAV Cat A/B visibility to RVR 5500 and Cat C/D/E visibility to RVR 6000. **RVR 1800 authorized with use of FD or AP or HUD to DA.	MALSR 	MISSED APPROACH: Climb to 5400 direct ZOVOC and hold.
----------	--	-----------	---

ATIS 125.3 270.275	LUBBOCK APP CON 119.2 351.8	LUBBOCK TOWER 120.5 239.3	GND CON 121.9 348.6	CLNC DEL 125.8 281.55
------------------------------	---------------------------------------	-------------------------------------	-------------------------------	---------------------------------

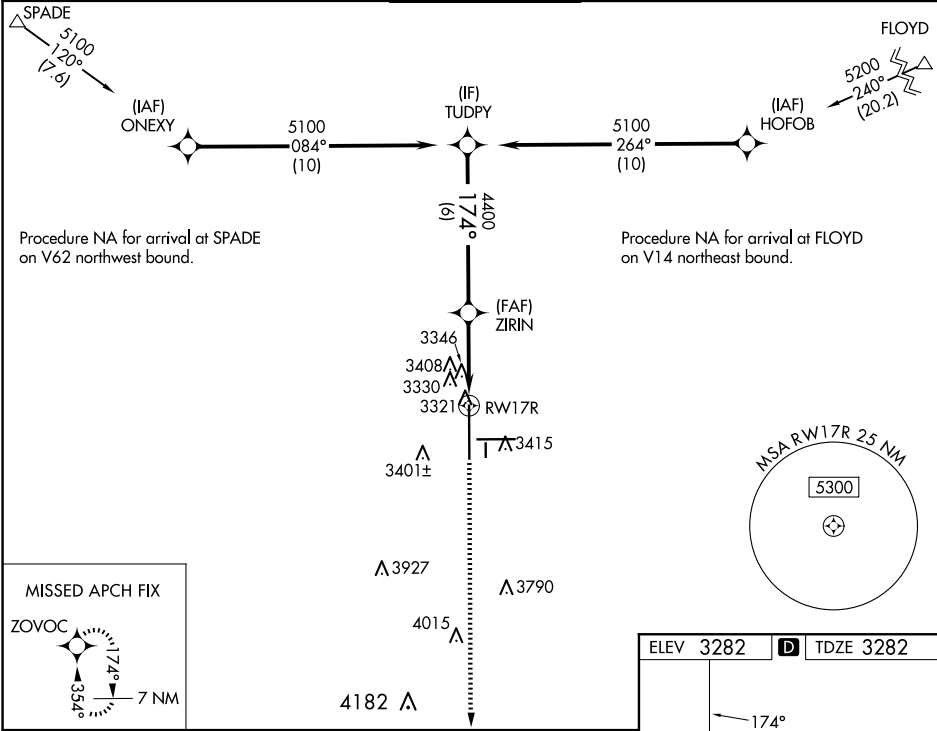

TUDPY 5100 GP 3.00° TCH 53° VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 69°) ZIRIN 4400 174° 4400 6 NM 2.3 NM 1 NM 5400 ↑ ZOVOC *1 NM to RW17R *LNAV only. RW17R					
CATEGORY	A	B	C	D	E
LPV DA **	3482/24 200 (200-½)				
LNAV/ VNAV DA	3591/24 309 (400-½)				
LNAV MDA	3700/24	418 (500-½)	3700/40	418 (500-¾)	
CIRCLING	3720-1 438 (500-1)	3740-1 458 (500-1)	3880-1½ 598 (600-1½)	3940-2 658 (700-2)	4100-3 818 (900-3)

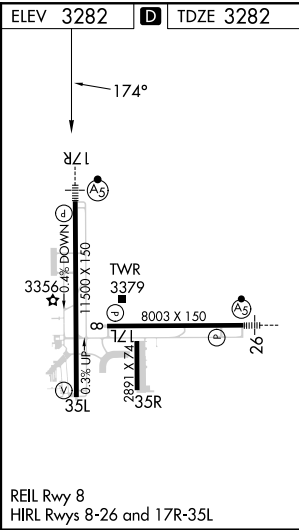

LUBBOCK, TEXAS
Amdt 2D 22APR21

33°40'N-101°49'W

LUBBOCK PRESTON SMITH INTL (LBB)
RNAV (GPS) Y RWY 17R

SC-2, 30 OCT 2025 to 27 NOV 2025

SC-2, 30 OCT 2025 to 27 NOV 2025