

WAAS CH 56421 W10A	APP CRS 102°	Rwy ldg 4184 TDZE 430 Apt Elev 437
--	------------------------	---

RNAV (GPS) RWY 10

MACON DOWNTOWN (MAC)


▼

NA

Baro-VNAV NA. DME/DME RNP-0.3 NA. Use Middle Georgia altimeter setting, when not received, use Robbins AFB altimeter setting and increase LPV DA to 726 feet, increase LNAV/VNAV DA to 833 feet and increase all MDA 20 feet.

MISSED APPROACH:
Climb to 3000 direct
JOBRA and hold.

MCN ASOS 120.775	ATLANTA APP CON ★ 124.2 279.6	UNICOM 123.0 (CTAF) 0
----------------------------	---	---------------------------------

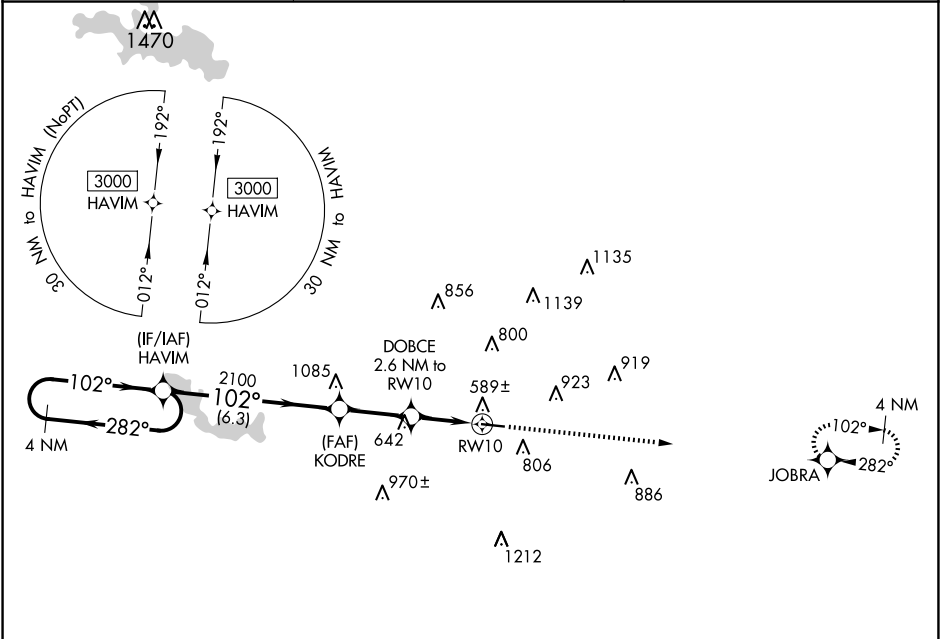

4 NM Holding Pattern		VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 23).		ELEV 437	D	TDZE 430
3000		HAYIM		3000	↑	JOBRA
GP 3.00° TCH 40		KODRE 2100		*LNAV only.		
2100		DOBCE 2.6 NM to RWY 10		RWY 10		
6.3 NM		2.6 NM		2.6 NM		
CATEGORY		A		B		C
LPV DA		712-1		282 (300-1)		
LNAV/VNAV DA		819-1 ³ / ₈		389 (400-1 ³ / ₈)		
LNAV MDA		880-1 450 (500-1)		880-1 ³ / ₈ 450 (500-1 ³ / ₈)		
CIRCLING		1200-1 763 (800-1)		1320-2 ³ / ₄ 883 (900-2 ³ / ₄)		1480-3 1043 (1100-3)
				MIRL Rwy 10-28 0		