

ST. LOUIS, MISSOURI

AL-360 (FAA)

25219

APP CRS	Rwy Ldg	10679
303°	TDZE	583
	Apt Elev	617

RNAV (RNP) Z RWY 30L
ST LOUIS LAMBERT INTL (STL)

RNP AR APCH - GPS. Authorization required

From FRDKO, JYAAR, KAACE, or TEEBE, min RNP 0.30. From PEJAA or JYAAR: RF.

T Use of FD or AP required during simultaneous operations. Simultaneous approach authorized with Rwy 29, except for arrivals at JYAAR and PEJAA. For uncompensated Baro-VNAV systems, procedure NA below -18°C or above 54°C. For inop ALS, increase RNP 0.30 all Cats visibility to RVR 6000.

MALSR



MISSED APPROACH: Climb to 3000 direct TUDNE and hold, continue climb-in-hold to 3000.

D-ATIS
125.025
379.925


ST. LOUIS APP CON
132.125 360.6

ST. LOUIS TOWER
118.5 257.7

GND CON
121.9 348.6 (Inbound)
121.65 377.175 (Outbound)
118.925 227.125 (Rwy 11/29)

CLNC DEL
119.5 363.1

CPDLC

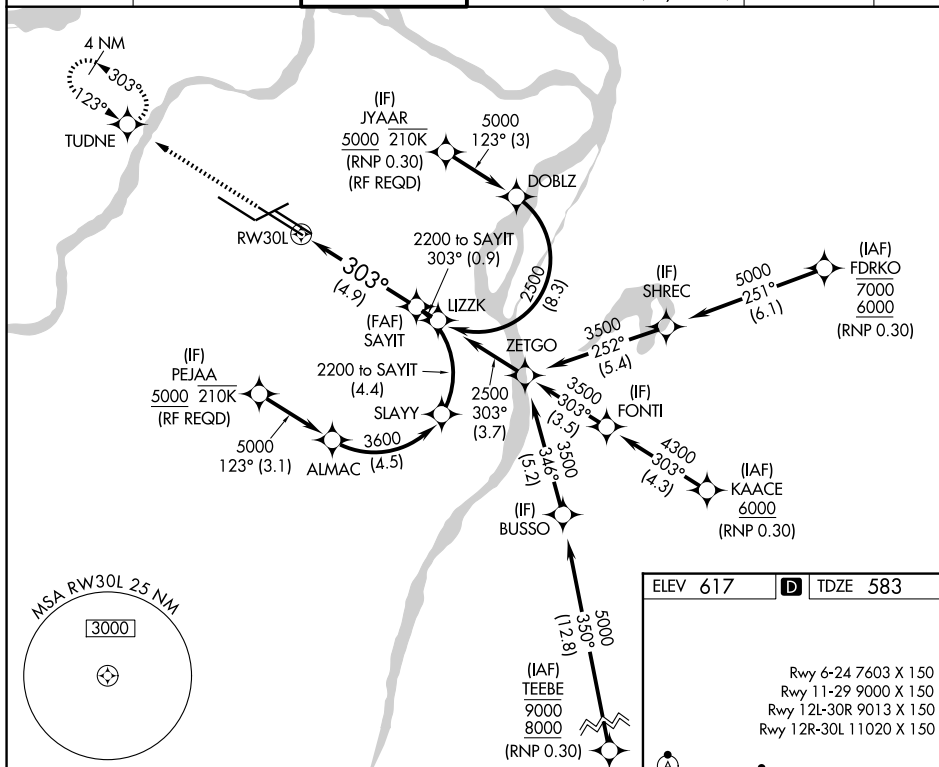

MSA RVL02 25 NM

3000

3000	TUDNE
------	-------

See planview for multiple IF locations.

SAYIT

I

2200

GP 3.00'

TCH 58

CATEGORY

A

B

C

RNP 0.30 DA

998/40 415 (400-³/₄)

AUTHORIZATION REQUIRED

HIRL all Rwyys

TDZ/CL Rwy 11, 12L, 12R, 29, and 30R

ST. LOUIS, MISSOURI

Amdt 1B 17APR25

38°45'N-90°22'W

ST LOUIS LAMBERT INTL (STL)

RNAV (RNP) Z RWY 30L

NC-3, 30 OCT 2025 to 27 NOV 2025