

WAAS CH 69523 W30A	APP CRS 298°	Rwy Idg TDZE Apt Elev	4400 3290 3298
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 30

CHADRON MUNI (CDR)



⚠


⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C (-5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Pine Ridge altimeter setting and increase all DA 70 feet and all MDA 80 feet; increase LPV all Cats visibility 1⁄8 mile, LNAV/VNAV all Cats visibility 1⁄4 mile, and LNAV and Circling Cat C visibility 1⁄4 mile. Baro-VNAV and VDP NA with Pine Ridge altimeter setting.

MISSED APPROACH:
Climb to 6300 direct CABAX and hold.

ASOS 118.05	DENVER CENTER 127.95 338.2	UNICOM 122.8 (CTAF) 📶
-----------------------	--------------------------------------	--

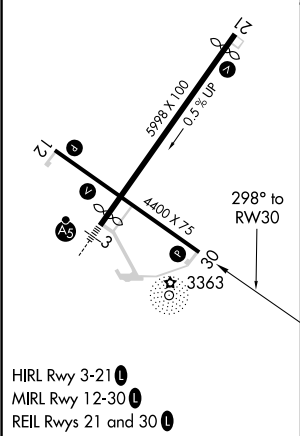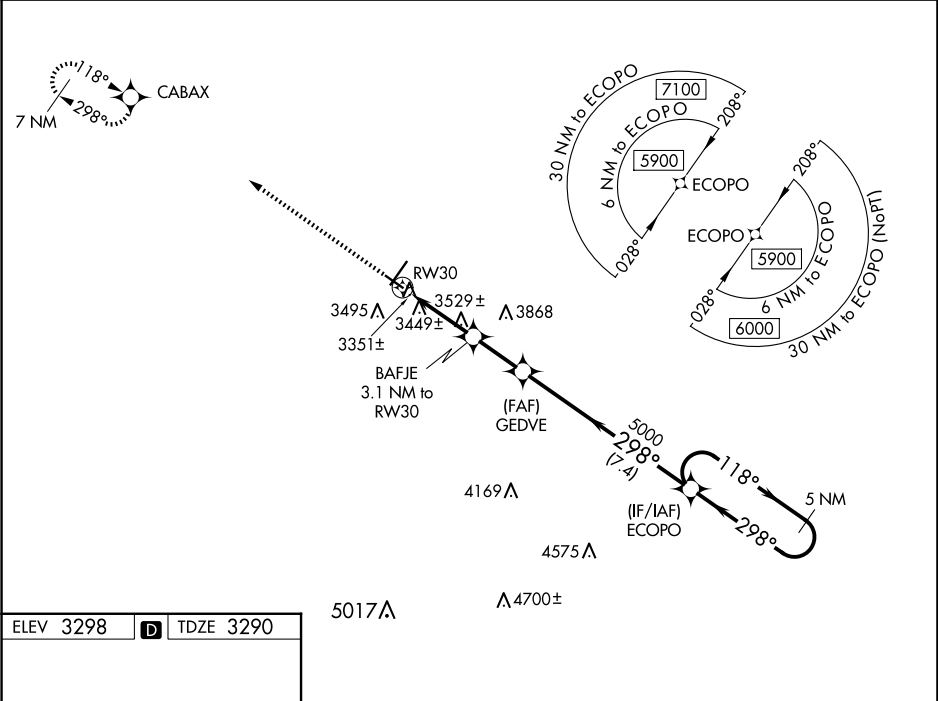

6300	CABAX	5 NM Holding Pattern			
					
* LNAV only		BAFJE 3.1 NM to RW30	GEDVE 5000	ECOPO	
					
CATEGORY		A	B	C	D
LPV DA	3540-1 250 (300-1)				NA
LNAV/VNAV DA	3767-1 ⁵ / ₈ 477 (500-1 ⁵ / ₈)				NA
LNAV MDA	3780-1 490 (500-1)			3780-1 ³ / ₈ 490 (500-1 ³ / ₈)	NA
CIRCLING	3820-1 522 (600-1)	3920-1 622 (700-1)	3920-1 ³ / ₄ 622 (700-1 ³ / ₄)		NA