

|         |          |      |
|---------|----------|------|
| APP CRS | Rwy Ldg  | 7000 |
| 300°    | TDZE     | 1232 |
|         | Apt Elev | 1249 |

RNAV (RNP) Z RWY 30

PANGBORN MEML (EAT)

✈

-6°C


For uncompensated Baro-VNAV systems, procedure NA below -10°C (14°F) or above 44°C (111°F). RF required. GPS required. FD or HUD required.

MISSED APPROACH: Climb to 6000 on track 300° to KULOC, right turn to FEXUB, and on track 135° to QUINT and hold.

\*Missed approach requires minimum climb of 320 feet per NM to 5500.

#Missed approach requires minimum climb of 325 feet per NM to 5500.

|                 |                         |                          |
|-----------------|-------------------------|--------------------------|
| ASOS<br>119.925 | SEATTLE CENTER<br>126.1 | UNICOM<br>123.0 (CTAF) 0 |
|-----------------|-------------------------|--------------------------|

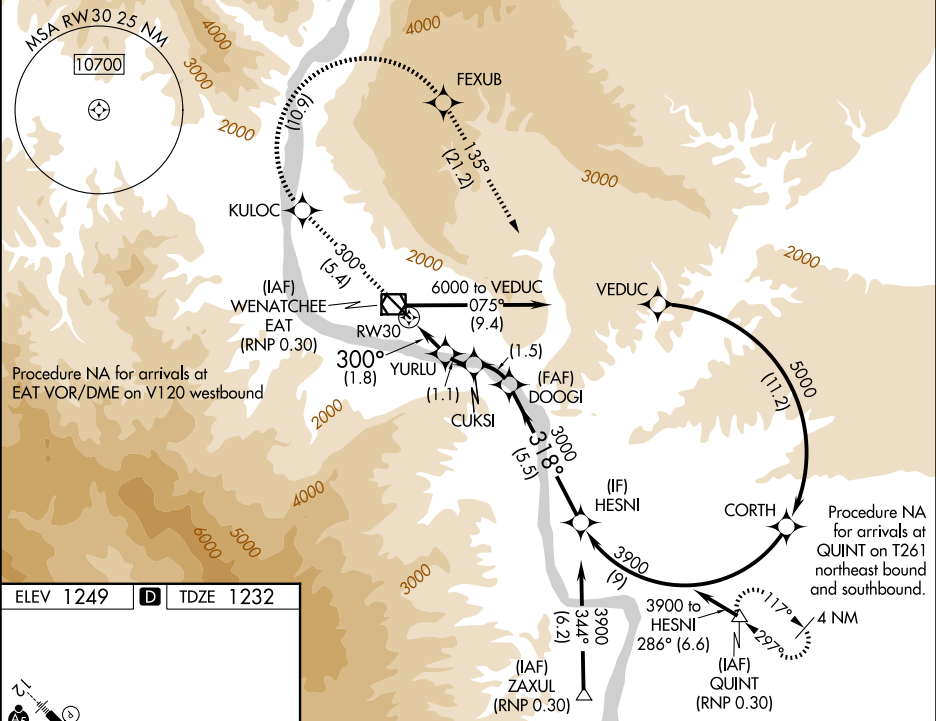

ELEV 1249 D TDZE 1232

REIL Rwy 30 0  
HIRL Rwy 12-30 0

|                                                                  |            |                 |            |                 |
|------------------------------------------------------------------|------------|-----------------|------------|-----------------|
| 6000                                                             | KULOC      | FEXUB           | QUINT      | HESNI           |
| tr 300°                                                          |            | tr 135°         |            |                 |
| VGSI and RNAV glidepath not coincident (VGSI Angle 4.30/TCH 46). |            |                 |            |                 |
| RW30                                                             | YURLU 1979 | CUKSI 2411      | DOOGI 3000 | 3900            |
| 300°                                                             | 300°       | 318°            | 3000       | GP 3.60° TCH 60 |
| 1.8 NM                                                           | 1.1 NM     | 1.5 NM          | 5.5 NM     |                 |
| CATEGORY                                                         | A          | B               | C          | D               |
| RNP 0.17 DA*                                                     | 1595-1     | 363 (400-1)     |            | NA              |
| RNP 0.30 DA#                                                     | 1686-1 3/8 | 454 (500-1 3/8) |            | NA              |
| AUTHORIZATION REQUIRED                                           |            |                 |            |                 |