


|                                        |                        |                             |                                     |
|----------------------------------------|------------------------|-----------------------------|-------------------------------------|
| WAAS<br>CH <b>65634</b><br><b>W06B</b> | APP CRS<br><b>062°</b> | Rwy Idg<br>TDZE<br>Apt Elev | <b>6014</b><br><b>6</b><br><b>8</b> |
|----------------------------------------|------------------------|-----------------------------|-------------------------------------|

RNAV (GPS) X RWY 6

TETERBORO (TEB)

|                                                                                                                                                                                                                                                |       |                                                                                                                                                                 |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| RNP APCH - GPS.<br>RADAR required.                                                                                                                                                                                                             | MALSR | MISSED APPROACH: Climb to 1000, then climbing left turn to 2000 direct TEBLE, cross TEBLE at or below 2000, then climb to 3000 on track 272° to UBUCK and hold. |
| ▼ Circling NA for Cats B, C and D northwest of Rwy 6 and 19. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -13°C or above 54°C. For inop ALS, increase LPV all Cats visibility to 1½ SM, and LNAV/VNAV all Cats visibility to 1⅞ SM. |       |                                                                                                                                                                 |

|              |                |                 |         |          |       |
|--------------|----------------|-----------------|---------|----------|-------|
| D-ATIS       | NEWARK APP CON | TETERBORO TOWER | GND CON | CLNC DEL | CPDLC |
| 114.2 132.85 | 127.6 379.9    | 119.5           | 121.9   | 128.05   |       |

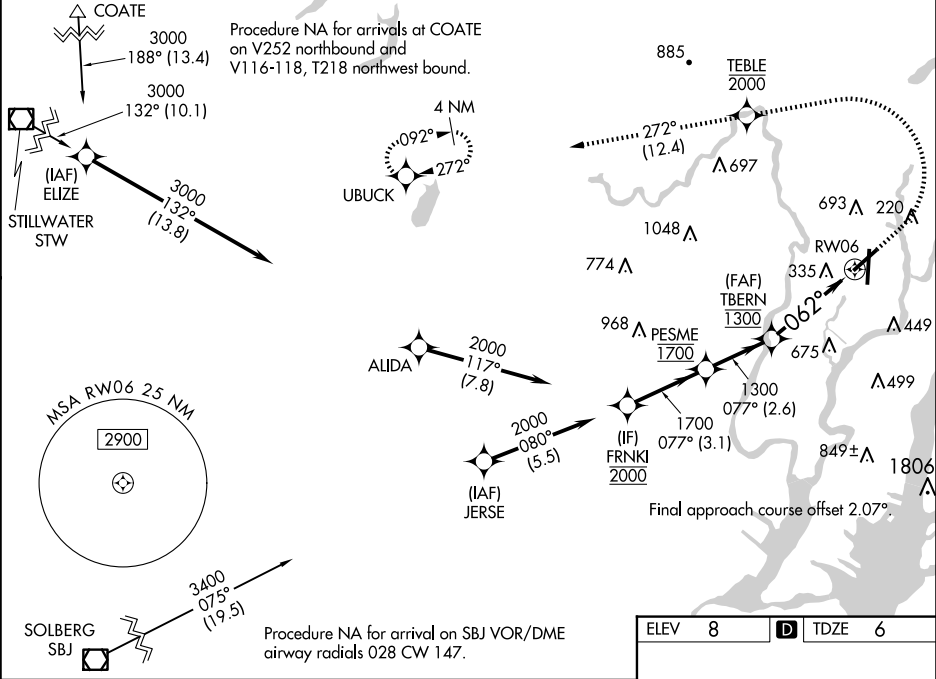

|                    |        |             |                        |                         |         |
|--------------------|--------|-------------|------------------------|-------------------------|---------|
| FRNKI              | 1000   | 2000        | TEBLE                  | 3000                    | UBUCK   |
| 2000               | ↑      | ↻           | ✱                      | ↑                       | tr 272° |
|                    |        |             | 2000                   |                         |         |
| GP 3.00°<br>TCH 55 |        |             | 1.9 NM to<br>RW06      |                         |         |
|                    | 3.1 NM | 2.6 NM      | 2 NM                   | 1.9 NM                  |         |
| CATEGORY           | A      | B           | C                      | D                       |         |
| LPV DA             |        | 459/45      | 453 (500-⅔)            |                         |         |
| LNAV/<br>VNAV DA   |        | 672-1½      | 666 (700-1½)           |                         |         |
| LNAV MDA           | 660/24 | 654 (700-½) | 660-1⅜                 | 654 (700-1⅜)            |         |
| CIRCLING           | 760-1  | 752 (800-1) | 820-2½<br>812 (900-2½) | 1040-3<br>1032 (1100-3) |         |

