


ILS or LOC RWY 20
ROGERS EXEC - CARTER FLD (ROG)

MISSED APPROACH: Climb to 2100 then climbing left turn to 4000 on heading 110° and RZC VORTAC R-048 to TEEUP/RZC VORTAC 12.6 DME and hold.

Autopilot coupled approach NA below 1632.

AWOS-3PT 134.375	RAZORBACK APP CON ★ 126.6 305.2	ROGERS TOWER ★ 119.375 (CTAF) 0	GND CON 118.0	CLNC DEL 121.75	CLNC DEL 121.75 (When hwr dosed)
----------------------------	---	--	-------------------------	---------------------------	---

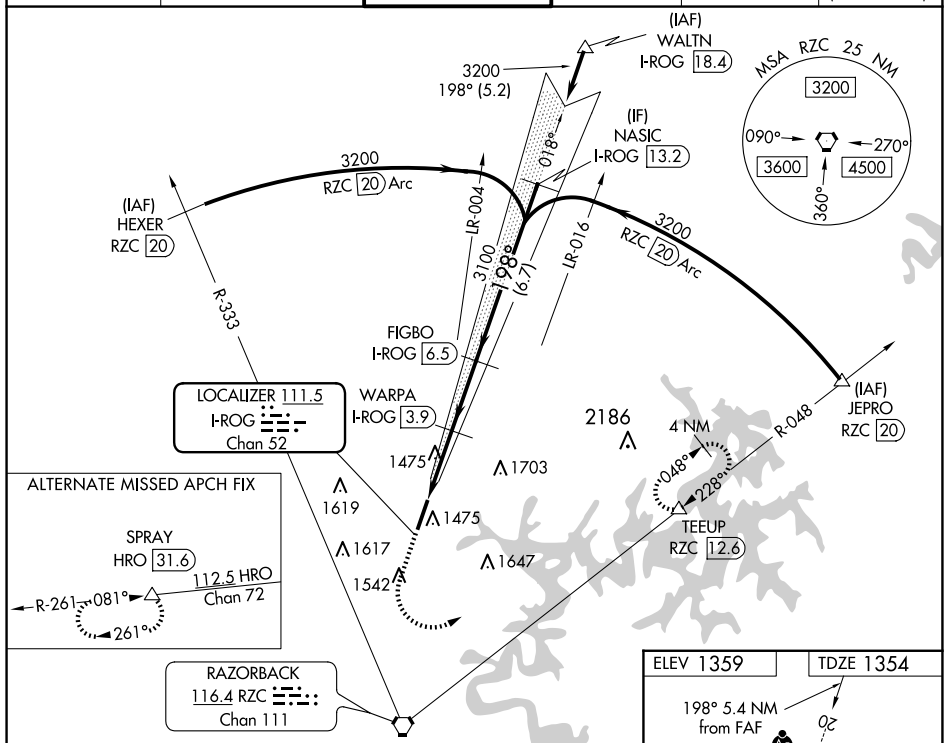

2100
↑
hdg 110°
RZC R-048
TEEPUP △

Use I-ROG DME when on LOC course.

FIGBO I-ROG 6.5

NASIC I-ROG 13.2

3200

198°

3100

GS 3.00° TCH 55

WARPA I-ROG 3.9

I-ROG 2.2

I-ROG 1.2

2240

1.1 NM 1.6 NM 2.7 NM 6.7 NM

CATEGORY	A	B	C	D
S-ILS 20	1554-½ 200 (200-½)			
S-LOC 20	1740-½ 386 (400-½)		1740-⅝ 386 (400-⅝)	
C CIRCLING	1840-1 481 (500-1)		2020-1¾ 661 (700-1¾)	2020-2 661 (700-2)

