

LOC/DME I-EKI 110.3 Chan 40	APP CRS 312°	Rwy Ldg TDZE 43 Apt Elev 46
---	------------------------	---

LOC RWY 31

CORPUS CHRISTI INTL (CRP)

DME or RADAR required.
RADAR required for procedure entry at ZULEX.


⚠

For inop ALS, increase S-LOC 31 Cats C, D, and E
visibility to 1 SM.

MALS R

MISSED APPROACH: Climb to 700 then climbing right
turn to 2000 on heading 335° and CRP VORTAC
R-287 to ATHIS INT/CRP VORTAC 23.3 DME and hold.

ATIS 126.8	CORPUS APP CON 120.9 348.725	CORPUS TOWER 119.4 257.8	GND CON 121.9 269.15	CLNC DEL 118.55
----------------------	--	------------------------------------	--------------------------------	---------------------------

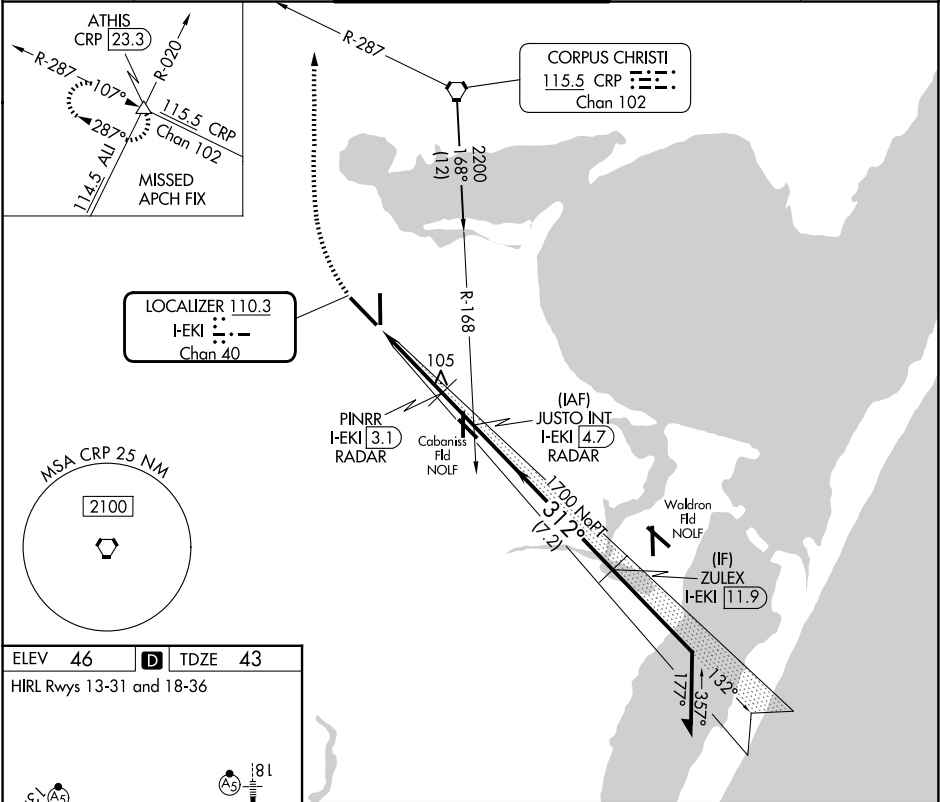

ELEV **46** **D** TDZE **43**

HIRL Rwy's 13-31 and 18-36

FAF to MAP 5.1 NM					
Knots	60	90	120	150	180
Min:Sec	5:06	3:24	2:33	2:02	1:42

700

2000

ATHIS

hdg 335°

CRP R-287

JUSTO INT I-EKI 4.7

RADAR

2200

1300

1700

132°

312°

Remain within 15 NM

VGSI and descent angles not coincident (VGSI Angle 3.00/ TCH 50).

CATEGORY	A	B	C	D	E
S-31	400-1/2	357 (400-1/2)	400-3/8	357 (400-3/8)	
CIRCLING	500-1 454 (500-1)	780-1 734 (800-1)	820-2 1/4 774 (800-2 1/4)	820-2 1/2 774 (800-2 1/2)	820-2 3/4 774 (800-2 3/4)