


LOC I-FLG 110.5	APP CRS 214°	Rwy Idg TDZE Apt Elev 7000 7003 7014
---------------------------	------------------------	--

ILS or LOC RWY 21
FLAGSTAFF PULLIAM (FLG)

V Autopilot coupled approach NA below 7640 feet. DME required. DME from FLG VOR/DME. Simultaneous reception of I-FLG and FLG DME required. For inop ALS increase S-ILS 21 all Cats visibility to $\frac{1}{2}$.	MALSR 	MISSED APPROACH: Climb to 7500, then climbing left turn to 11000 on heading 130° and FLG R-172 to OATES INT/FLG VOR/DME 16.7 DME and hold, continue climb-in-hold to 11000.
---	---	--

ATIS 125.8	PHOENIX APP CON 126.375 236.775	FLAGSTAFF TOWER ★ 134.55 (CTAF) 0 239.25	GND CON 121.9	UNICOM 122.95
-----------------------------	--	---	--------------------------------	--------------------------------

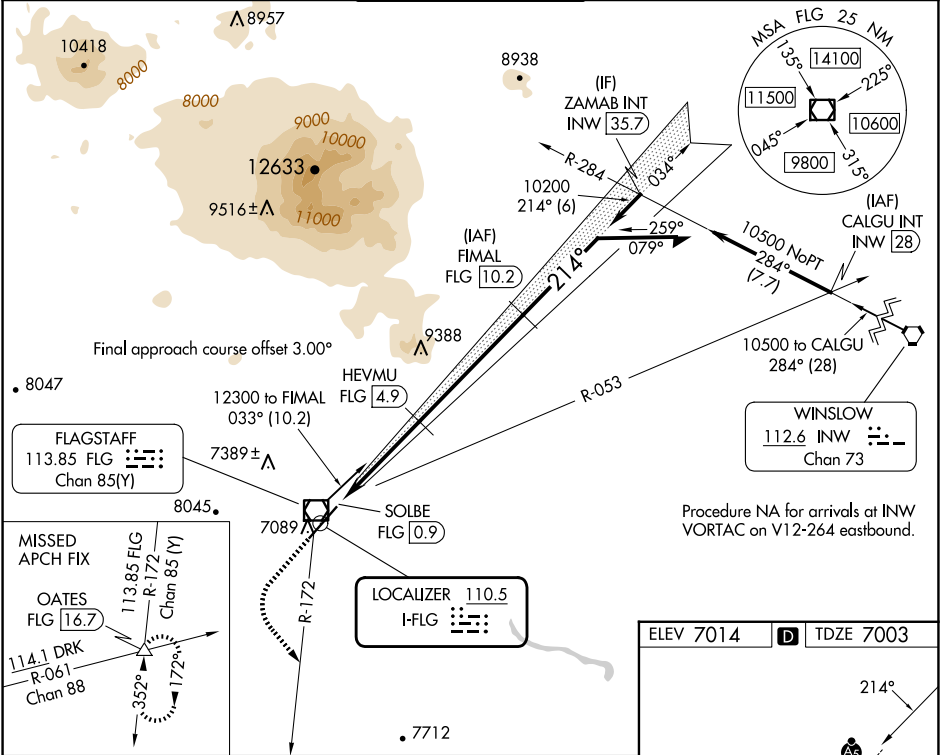

7500	11000	FLG R-172	OATES	FIMAL FLG [10.2]	Remain within 10 NM
↑	hdg 130°	Δ	Δ	10200	
* LOC only	* FLG [1.3]	HEVMU FLG [4.9]		12300	
SOLBE FLG [0.9]				10200	
8500*					GS 3.00° TCH 52
0.4	0.5	3.7 NM	5.3 NM		
CATEGORY	A	B	C	D	
S-ILS 21	7258- $\frac{1}{2}$	255 (300- $\frac{1}{2}$)			
S-LOC 21	7340- $\frac{1}{2}$	337 (400- $\frac{1}{2}$)			
CIRCLING	7520-1 506 (600-1)	7560-1 546 (600-1)	8100-3 1086 (1100-3)	8560-3 1546 (1600-3)	

