

(BLTWY7.BLTWY) 21280

AL-5757 (FAA)

BAYTOWN (HPY)
BAYTOWN, TEXAS

BLTWY SEVEN DEPARTURE (RNAV)


CTAF
122.8
HOUSTON DEP CON
134.45 284.0

TOP ALTITUDE:
ASSIGNED BY ATC

NOTE: RADAR required.
NOTE: DME/DME/IRU or GPS required.
NOTE: RNAV 1.

TAKEOFF MINIMUMS

Rwy 14, 32: Standard with minimum climb
of 500' per NM to 540.

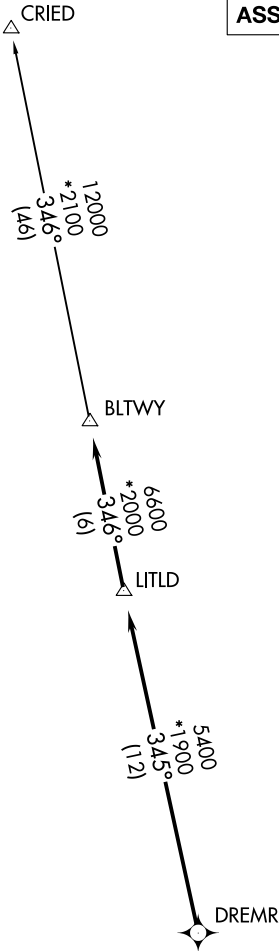


DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAY 14: Climb on heading 140°
to 540 for RADAR vectors to DREMR, thence . . .

TAKEOFF RUNWAY 32: Climb on heading 320°
to 540 for RADAR vectors to DREMR, thence . . .

...on track 345° to LITLD, then on track 346°
to BLTWY, then on (transition). Maintain ATC
assigned altitude. Expect filed altitude 10
minutes after departure.

CRIED TRANSITION (BLTWY7.CRIED)



NOTE: Chart not to scale.

BLTWY SEVEN DEPARTURE (RNAV)
(BLTWY7.BLTWY) 07OCT21

BAYTOWN, TEXAS
BAYTOWN (HPY)

SC-5, 30 OCT 2025 to 27 NOV 2025

SC-5, 30 OCT 2025 to 27 NOV 2025