

WAAS CH 93922 W17A	APP CRS 172°	Rwy Ldg TDZE 1616 Apt Elev 1616
--	------------------------	---


RNAV (GPS) RWY 17

CLINTON RGNL (CLK)


DME/DME RNP-0.3 NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -12°C (11°F) or above 54°C (130°F). Circling NA to Rwy 13 and 31. When local altimeter setting not received, use Weatherford altimeter setting; Increase DA to 1898 and all visibilities ½ mile; increase all MDA 40 feet and visibility Cat C ¼ mile. Baro-VNAV and VDP NA when using Weatherford altimeter setting.

MISSED APPROACH: Climb to 4000 direct OSUCU and hold.

AWOS-3 119.225	FORT WORTH CENTER 128.4 269.37	UNICOM 122.8 (CTAF) 0
--------------------------	--	---------------------------------

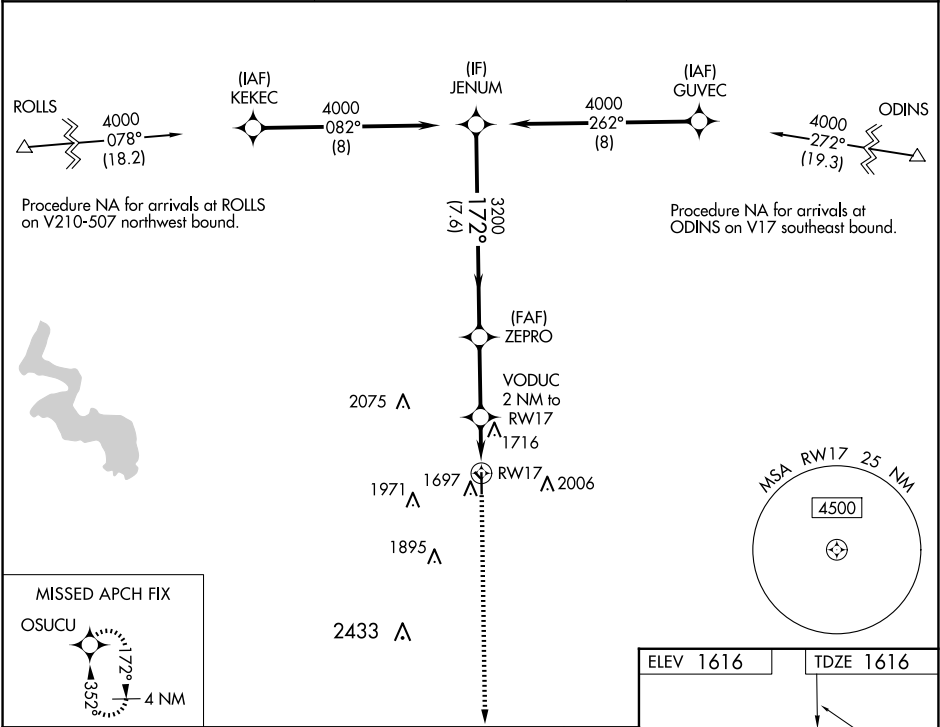

JENUM		ZEPRO		VODUC 2 NM to RW17		4000 ↑	OSUCU ✦
4000		3200		*2280		*LNAV only.	
GP 3.00° TCH 40		7.6 NM		2.9 NM		*1 NM to RW17 ↓	
172°		3200		RW17		↘	
CATEGORY	A	B	C	D			
LPV DA	1866-7/8		250 (300-7/8)				NA
LNAV/ VNAV DA	1866-7/8		250 (300-7/8)				NA
LNAV MDA	1980-1		364 (400-1)				NA
CIRCLING	2100-1 484 (500-1)	2220-1 604 (700-1)	2320-2 704 (800-2)				NA

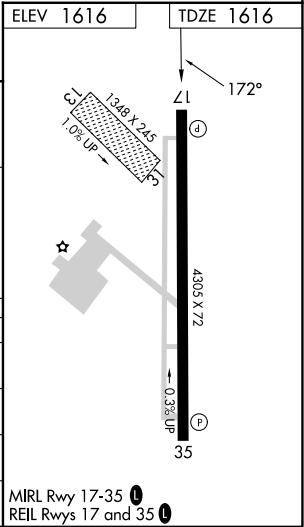

CLINTON RGNL (CLK)

RNAV (GPS) RWY 17