

WAAS CH 70407 W29A	APP CRS 291°	Rwy Ldg TDZE 127 Apt Elev 145
--	------------------------	---

RNAV (GPS) RWY 29

SKAGIT RGNL (BVS)

RNP APCH.


▼

⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C.
Baro-VNAV and VDP NA when using Friday Harbor altimeter setting. When local altimeter setting not received use Friday Harbor altimeter setting; increase LPV DA to 438 feet, LNAV/VNAV DA to 536 feet and all Cats visibility ¼ SM; increase all MDA 60 feet.

MISSED APPROACH: Climb to 4000 direct SOCLO and hold, continue climb-in-hold to 4000.

AWOS-3 121.125	WHIDBEY APP CON 120.7 270.8	UNICOM 123.075 (CTAF) 1
--------------------------	---------------------------------------	-----------------------------------

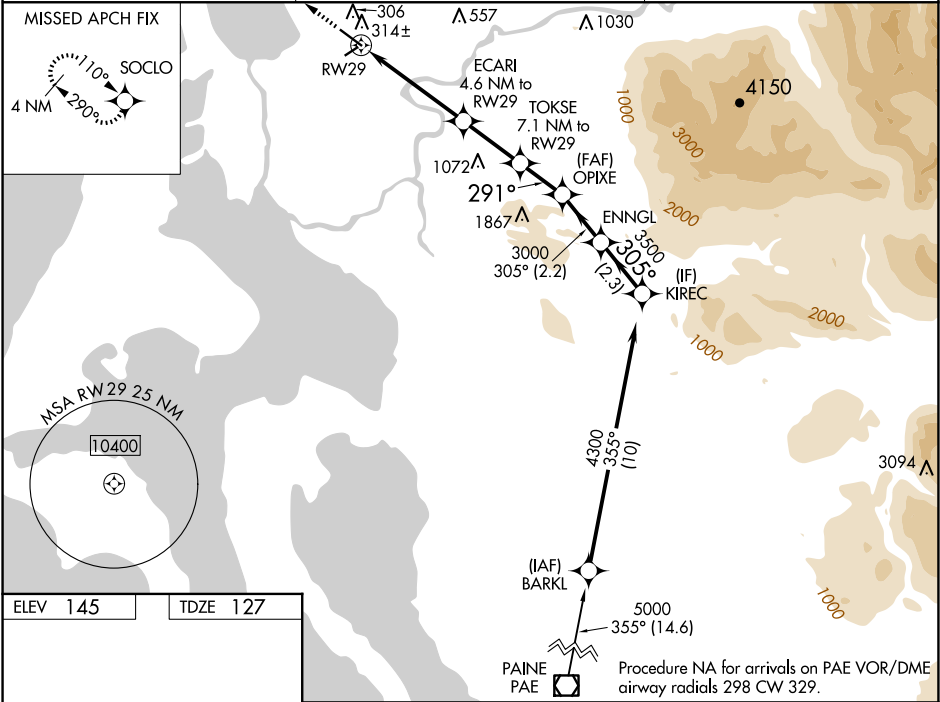

LIRL Rwy 4-22 
 REIL Rwys 11 and 29 
 MIRL Rwy 11-29 

4000 ↑ SOCLO 											
*LNAV only		ECARI 4.6 NM to RW29 TOKSE 7.1 NM to RW29 OPIXE 3000 ENNGL 3000 KIREC 4300									
		* 1.4 NM to RW29 1600* 291° 2400* 3000 3500 305°									
		GP 3.00° TCH 42°									
		1.4 NM 3.2 NM 2.5 NM 1.9 NM 2.2 NM 2.3 NM									
CATEGORY		A		B		C		D			
LPV	DA	377-7⁄8		250 (300-7⁄8)							
LNAV/VNAV	DA	475-1¼		348 (400-1¼)							
LNAV	MDA	580-1	453 (500-1)	580-1⅓		453 (500-1⅓)					