

WAAS CH 50333 W01A	APP CRS 013°	Rwy Ldg TDZE 857 Apt Elev 858
--	------------------------	---

RNAV (GPS) RWY 1

KEWANEE MUNI (EZI)


▼

▲ NA

Baro-VNAV NA. DME/DME RNP-0.3 NA. Helicopter visibility reduction below ¾ SM NA. Use Galesburg altimeter setting; when not received, use Moline altimeter setting and increase all DA 29 feet and all MDA 40 feet, increase LPV all Cats visibility ½ mile, and Circling Cat C visibility ¼ mile.

MISSED APPROACH:
Climb to 2400 direct YABYU and hold.

QUAD CITY APP CON ★ 133.275 257.8	UNICOM 122.8 (CTAF) 0
---	---------------------------------

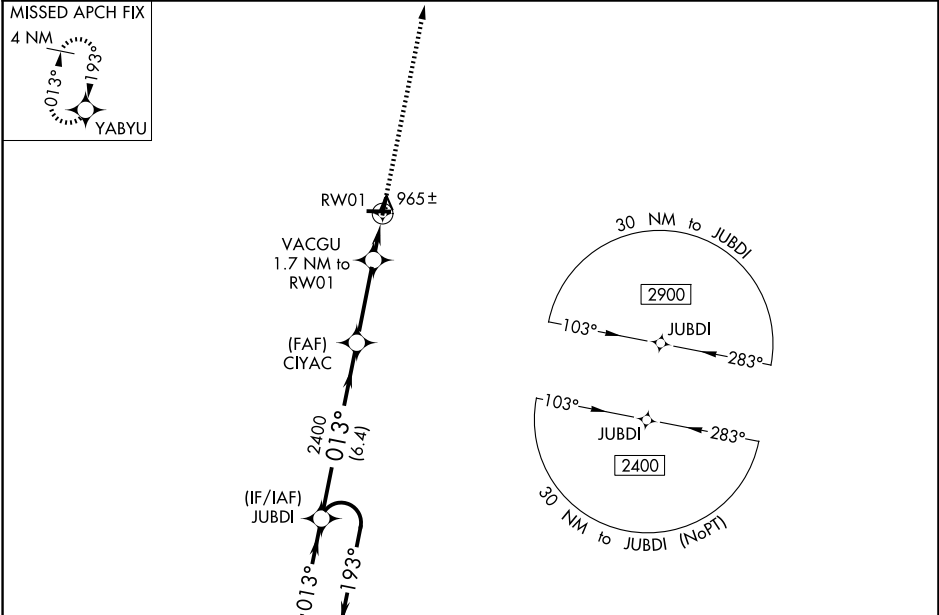

4 NM Holding Pattern		*RNAV only		2400	YABYU
GP 3.00° TCH 40		6.4 NM		3 NM	1.7 NM
CATEGORY	A	B	C	D	
LPV DA	1182-1⅛ 325 (400-1⅛)				NA
RNAV/VNAV DA	1212-1¼ 355 (400-1¼)				NA
RNAV MDA	1300-1 443 (500-1)	1300-1⅛ 443 (500-1⅛)		NA	
CIRCLING	1340-1 482 (500-1)	1520-1 662 (700-1)	1520-1¼ 662 (700-1¼)	NA	

ELEV 858 TDZE 857

MIRL Rwy 1-19 and 9-27 0