

WAAS CH 45716 W35A	APP CRS 354°	Rwy Idg TDZE Apt Elev	5001 956 971
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 35


PAULS VALLEY MUNI (P.V.J)

RNP APCH.

When local altimeter setting not received, use Ardmore Downtown Exec altimeter setting: increase all DA 97 feet and all MDA 100 feet; increase LPV and LNAV/VNAV all Cats visibility and LNAV Cats C/D and Circling Cat C visibility $\frac{1}{4}$ SM and Circling Cat D visibility $\frac{1}{2}$ SM. Baro-VNAV and VDP NA when using Ardmore Downtown Exec altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 46°C .


MISSED APPROACH:
Climb to 3000 direct MELIE and hold.

AWOS-3 118.675	FORT WORTH CENTER 124.75 323.0	UNICOM 122.8 (CTAF)
--------------------------	--	-------------------------------

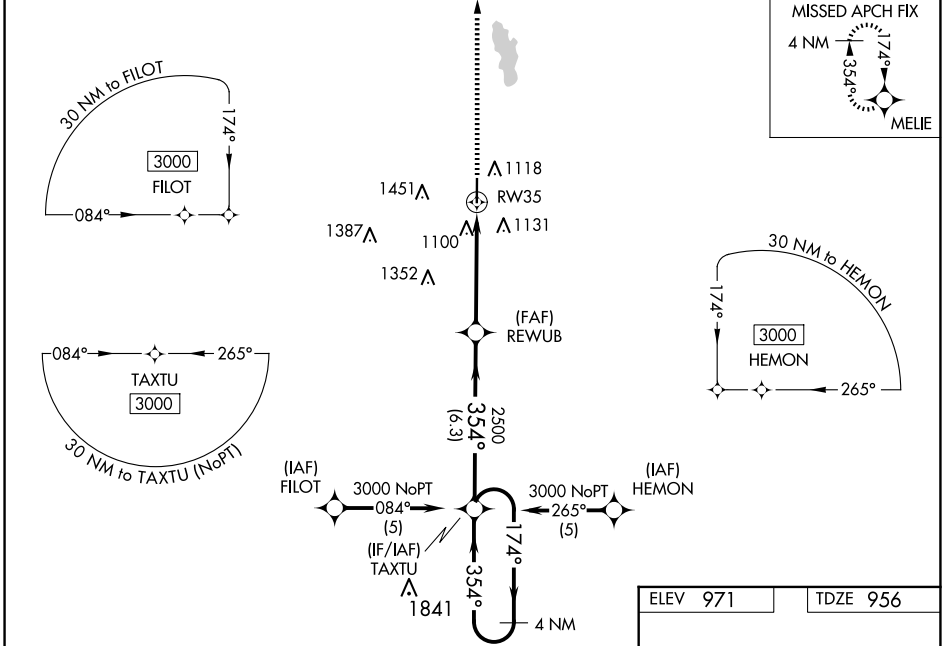

SC-1, 30 OCT 2025 to 27 NOV 2025

SC-1, 30 OCT 2025 to 27 NOV 2025

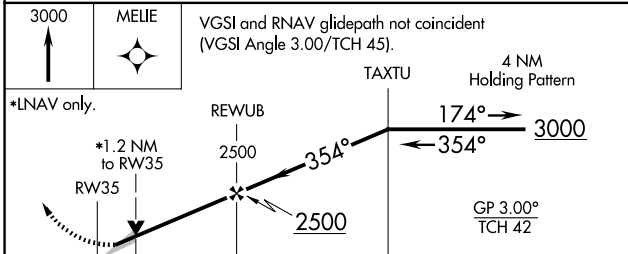

CATEGORY	A	B	C	D
LPV DA		1156- $\frac{3}{4}$	200 (200- $\frac{3}{4}$)	
LNAV/VNAV DA		1447- $1\frac{3}{4}$	491 (500- $1\frac{3}{4}$)	
LNAV MDA	1360-1	404 (400-1)	1360- $1\frac{1}{4}$	404 (400- $1\frac{1}{4}$)
CIRCLING	1440-1	469 (500-1)	1540- $1\frac{1}{2}$ 569 (600- $1\frac{1}{2}$)	1760- $2\frac{1}{2}$ 789 (800- $2\frac{1}{2}$)

