




WAAS CH 53546 W16B	APP CRS 170°	Rwy Ldg TDZE 5326 Apt Elev 5434
--	------------------------	---

RNAV (GPS) Y RWY 16R


DENVER INTL (DEN)

RNP APCH - GPS. ⚠ LNAV procedure NA during simultaneous operations. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -25°C or above 54°C. Use of FD or AP required during simultaneous operations. For inop ALS, increase LNAV/VNAV all Cais visibility to RVR 4000. Simultaneous approach authorized.	MALSR 	MISSED APPROACH: Climb to 5900 then climbing right turn to 10000 direct BINBE and hold, continue climb-in-hold to 10000.
--	-----------	--

D-ATIS 125.6 379.9	DENVER APP CON 119.3 307.3 (N) 120.35 379.3 (S)	DENVER TOWER 135.3 351.95	GND CON 121.35 379.175 (W) 121.85 377.1 (E)
------------------------------	---	-------------------------------------	---

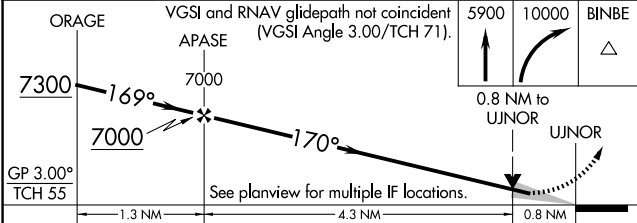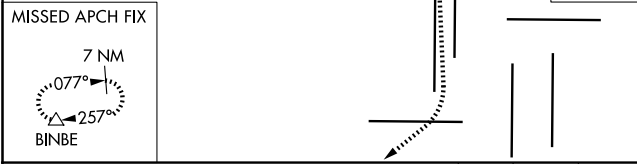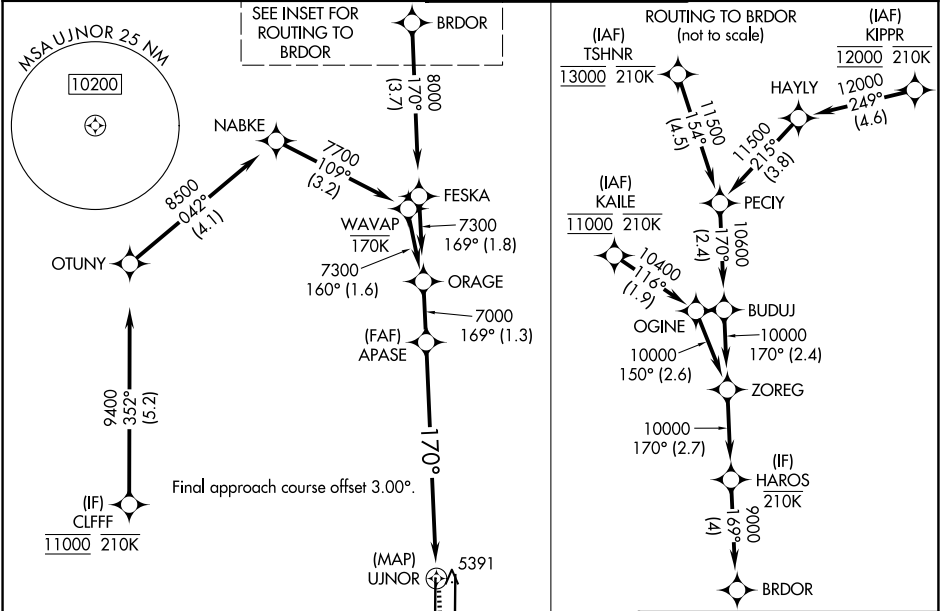

CATEGORY	A	B	C	D
LPV DA		5576/24	250 (200-½)	
LNAV/VNAV DA		5582/24	256 (200-½)	
LNAV MDA	5660/24	334 (300-½)	5660/26	334 (300-½)

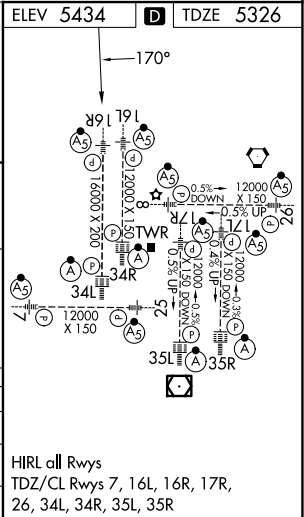

SW-1, 30 OCT 2025 to 27 NOV 2025

SW-1, 30 OCT 2025 to 27 NOV 2025