

WAAS CH 78433 W17A	APP CRS 179°	Rwy Ldg TDZE Apt Elev	5010 1010 1010
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 17

RUSSELL COUNTY (K24)



▼

▲ NA

Baro-VNAV NA when using Wayne County altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). When local altimeter setting not received, use Wayne County altimeter setting increase all DA 42 feet and increase all MDA 60 feet; increase LPV all Cats ½ mile; LNAV/VNAV all Cats ¼ mile and LNAV and Circling Cats C/D visibility ¼ mile. DME/DME RNP-0.3 NA. Helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH:
Climb to 4000 direct
TEYOS and hold.

AWOS-3 119.6	INDIANAPOLIS CENTER 124.625 371.925	UNICOM 123.0 (CTAF) 0
------------------------	---	---------------------------------

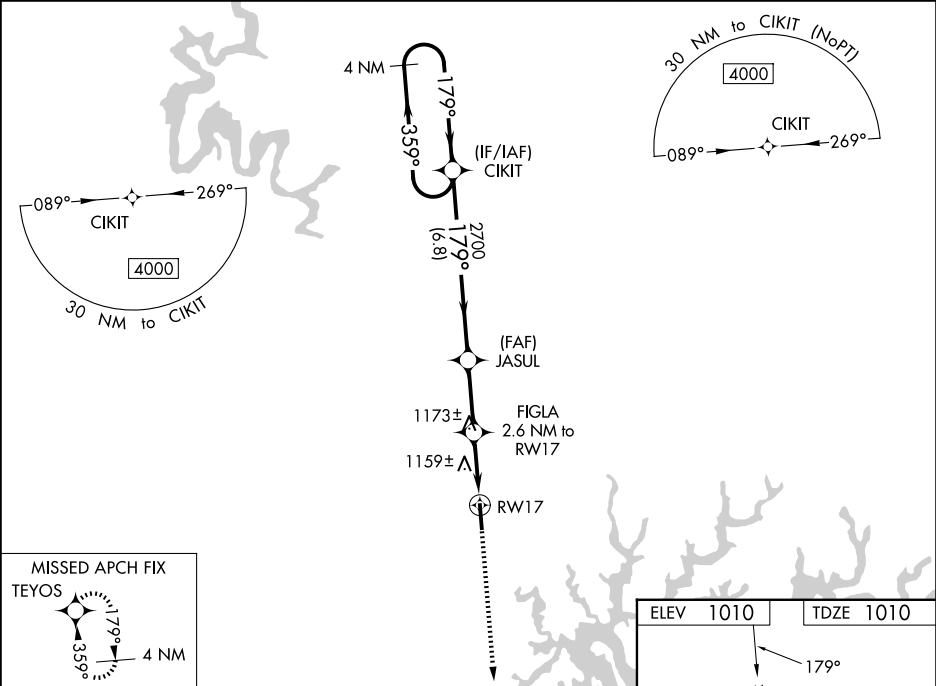

4 NM Holding Pattern		CIKIT	JASUL	FIGLA	RW17
4000		359°	179°	2700	*1860
GP 3.00° TCH 37		6.8 NM	2.6 NM	2.6 NM	
CATEGORY	A	B	C	D	
LPV DA	1346-1½		336 (400-1½)		
LNAV/VNAV DA	1424-1¾		414 (500-1¾)		
LNAV MDA	1420-1	410 (500-1)	1420-1½	410 (500-1½)	
CIRCLING	1540-1 530 (600-1)	1620-1 610 (700-1)	1700-2 690 (700-2)	1700-2¼ 690 (700-2¼)	

