

|                                        |                        |                                                           |
|----------------------------------------|------------------------|-----------------------------------------------------------|
| WAAS<br>CH <b>63000</b><br><b>W30A</b> | APP CRS<br><b>300°</b> | Rwy Idg <b>3482</b><br>TDZE <b>5</b><br>Apt Elev <b>5</b> |
|----------------------------------------|------------------------|-----------------------------------------------------------|

RNAV (GPS) RWY 30


MUSTANG BEACH (R.A.S)



DME/DME RNP-0.3 NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1.5°C (5°F) or above 44°C (111°F). If local altimeter setting not received, use Corpus Christi Intl altimeter setting and increase all DAs/MDAs 60 feet. Baro-VNAV and VDP NA when using Corpus Christi Intl altimeter setting.

MISSED APPROACH: Climb to 2000 direct HOSRU and hold.

|                          |                                      |                      |
|--------------------------|--------------------------------------|----------------------|
| AWOS-3<br><b>118.425</b> | CORPUS APP CON<br><b>125.4 307.9</b> | CTAF<br><b>122.9</b> |
|--------------------------|--------------------------------------|----------------------|

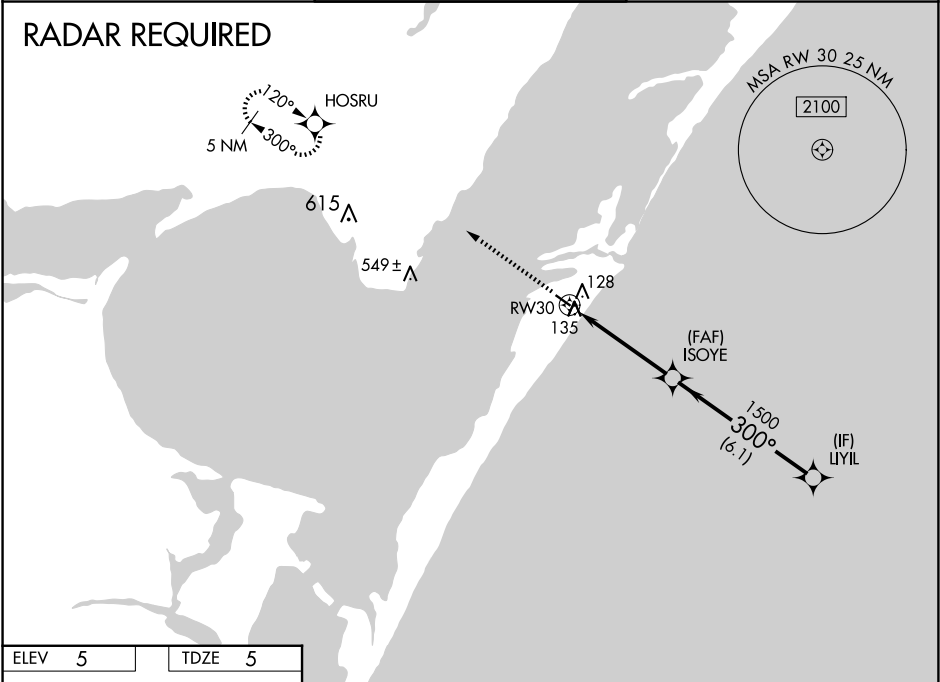

ELEV 5

TDZE 5

2000

HOSRU






VGSI and RNAV glidepath not coincident (VGSI Angle 3.20/TCH 22).

Procedure Turn NA

\* LNAV only

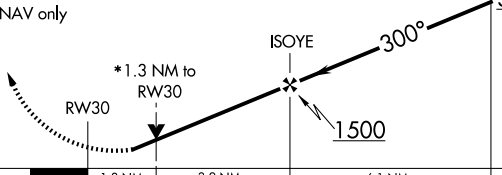

GP 3.00° TCH 35

| CATEGORY     | A      | B            | C  | D |
|--------------|--------|--------------|----|---|
| LPV DA       | 362-1¼ | 357 (400-1¼) | NA |   |
| LNAV/VNAV DA | 435-1½ | 430 (500-1½) | NA |   |
| LNAV MDA     | 440-1  | 435 (500-1)  | NA |   |
| CIRCLING     | 500-1  | 495 (500-1)  | NA |   |

MIRL Rwy 12-30

SC-3, 30 OCT 2025 to 27 NOV 2025

SC-3, 30 OCT 2025 to 27 NOV 2025