

WAAS CH 49111 W14A	APP CRS 143°	Rwy Idg TDZE Apt Elev	7140 1275 1303
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 14

BRANSON (BBG)

RNP APCH.


▼

▲

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 46°C. When local altimeter setting not received, use Harrison altimeter setting and increase all DA 47 feet and all MDA 60 feet. VDP and Baro-VNAV NA when using Harrison altimeter setting.

MISSED APPROACH: Climb to 4000 direct UYULA and hold.

ATIS 124.625	SPRINGFIELD APP CON 126.35	BRANSON TOWER★ 128.15 (CTAF) 0	GND CON 118.4	CLNC DEL 118.4	SPRINGFIELD CLNC DEL 126.35 (When tower closed)	UNICOM 122.95
------------------------	--------------------------------------	---	-------------------------	--------------------------	--	-------------------------

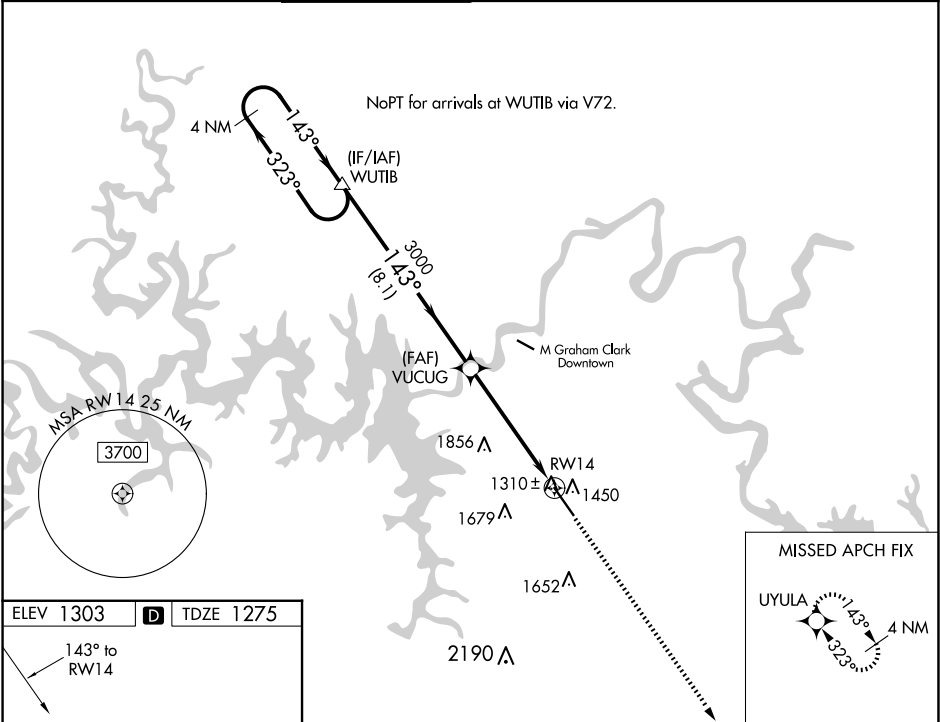

ELEV 1303 **D** TDZE 1275

143° to RWY 14

0.7 NM UP

TWR ☆

7140 x 150

REIL Rwy 14 **0**

HIRL Rwy 14-32 **0**

4 NM Holding Pattern		WUTIB		4000		UYULA	
←323° 4000 →143°				VUCUG 3000 *2.2 NM to RW14		*LNAV only	
GP 3.00° TCH 51		8.1 NM		3 NM		RW14	
		3000					
CATEGORY	A	B	C	D			
LPV DA	1525-1 250 (300-1)						
LNAV/ VNAV DA	1798-2 523 (500-2)						
LNAV MDA	2020-1 745 (800-1)	2020-1¼ 745 (800-1¼)	2020-2¼ 745 (800-2¼)	2020-2½ 745 (800-2½)			

NC-3, 30 OCT 2025 to 27 NOV 2025

NC-3, 30 OCT 2025 to 27 NOV 2025