

APP CRS	Rwy Ldg	8009
164°	TDZE	364
	Apt Elev	374

RNAV (RNP) Z RWY 16R

MAHLON SWEET FLD (EUG)


RNP AR APCH.

▼ For uncompensated Baro-VNAV systems, procedure NA below -9°C or above 54°C. Simultaneous approach authorized. For inop ALS, increase RNP 0.17 all Cats visibility to RVR 4000 and RNP 0.30 all Cats visibility to RVR 5500.

ALSF-2

MISSED APPROACH: Climb to 5000 direct TIPIE, and on track 209° to ROKBE, and track 254° to VAUGN and hold, continue climb-in-hold to 5000.

ATIS 125.225	CASCADE APP CON★ 119.6 348.7	EUGENE TOWER★ 118.9 (CTAF) 371.9 (16R/34L) 124.15 371.9 (16L/34R)	GND CON 121.7 269.5	UNICOM 122.95
-----------------	---------------------------------	---	------------------------	------------------

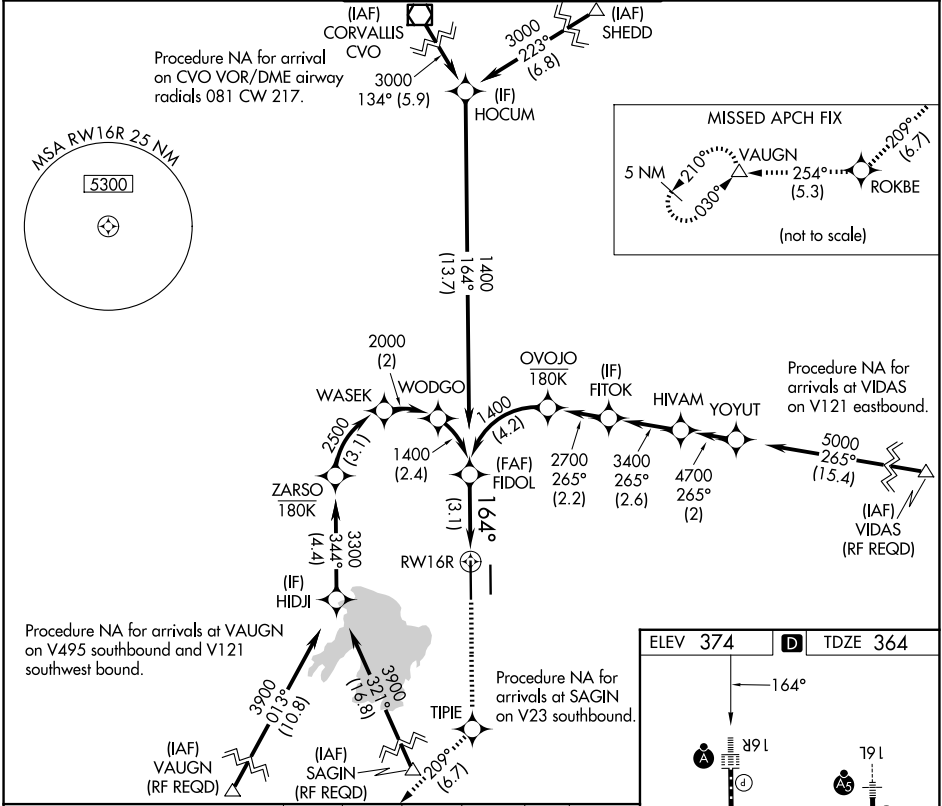

FIDOL

1400

1400

164°

RW16R

GP 3.00°

TCH 51

See planview for multiple IF locations.

3.1 NM

CATEGORY	A	B	C	D
RNP 0.17 DA	614/24 250 (300-½)			
RNP 0.30 DA	711/30 347 (400-¾)			

AUTHORIZATION REQUIRED

